BRINKMANN

Putzmeister



Wear parts
Machines

Delivery lines

Application accessories
and spare parts

Service / wear parts

Valid from 06/2026

Spare parts and accessories

for plastering machines, screed conveyors and fine concrete pumps

Putzmeister Genuine Accessories

The Putzmeister Mörtelmaschinen GmbH has one of the world's most extensive ranges of high-performance machinery for semi-dry floor screed, self levelling floor screed, plaster and fine concrete or shotcrete applications.

Maximum availability guaranteed
Thanks to the highest quality standards we are able to guarantee you a maximum service life and wear resistance. However, maintenance and repairs cannot be avoided in tough everyday operation on the building site. Here too we assist you as a reliable partner. This also includes 12,000 items in stock that we can deliver to you in the shortest possible time. Thus, your machine is fully operational again in a very short time.

The same also applies to original spare parts for your oldtimer. Fortunately, there are more of these than you think.

Flexibility thanks to quality accessories
Additionally, you can adapt your machine to your needs thanks to our wide range of accessories. Adapt to meet requirements.

Place your trust in Putzmeister and our genuine accessories and spare parts.



Table of contents

Wear Parts Machines

Wear parts compressed-air conveyor
Wear plates 6
Mixers 9
Hoppers 10
Safety grid/Seals for mixer drum. 11
Outlets mixing chambers 11

Wear parts worm pumps
Stators and Rotors D-pumps 12
Stators and Rotors L-pumps 14
Stators and Rotors other pumps 16
Mounting spray 17

You can also find other wear parts in the section "Service and Wear Parts".

Delivery Line Systems

Delivery lines
Mortar hoses. 20
Delivery hoses 26
Concrete hoses 28
Pipe clamps. 28
Hose caddy 28
Delivery pipes 29
Pumping aids. 29
Reductions 32

Couplings and spare parts
Cardan couplings
for mortar and delivery hoses 33
PM couplings
for mortar and delivery hoses 34
SK couplings
for concrete hoses and delivery pipes . . . 36
GEKA quick-release couplers 36
Seals. 37
Cam levers 37
Hose clips 38

Cleaning
Sponge rubber balls. 39

Application Accessories and Spare Parts

Screed
Discharge stands 42
Smoothing machine 44
Tools for screed layers 47
Screed layer trousers 48
Overshoes, spikes, knee pads 49

Plastering
Spray guns with nozzles 50
Compressors. 54
Hopper guns 54
Water pumps. 55
In-line mixers. 55
Tools for plasterers 56

Concrete
Spray guns with nozzles 59
Pumping aids, PM slick-pak 59

Application accessories General
Water hoses and air hoses 60
Hose clips for air hoses 60
Hose connector 60
Pressure gauges 61
Cleaning and care products 62
Test and measurement equipment 63
Accessories General 63
Machine and working accessories. 64
Cables and cable drums. 65

Service and Wear Parts

Service and maintenance kits
Overview of service packages. 68
M 7*0/5 Stage V 70
DC 260-45(55) Stage V / non eu 72
SP 11 74
SP 25 DQR 76
SP 25 DHF / FHS 250 78
S 5 EV/TM 80
MP 25 82
P 720 / P 730 84
P 13 86
SP 20 GHF/2. 90

Remote controls
Remote controls. 91

1. Wear Parts Machines



Matched to the application

The delivery of fine plaster places other demands on the individual components than sand or gravel. The costs, particularly for wear and spare parts, must be kept manageable, however.

For this reason, our machines have wear parts that are matched to the relevant, intended purpose in their service life.



Wear parts Compressed-air Conveyors

Wear plates 6
Mixers 9
Hoppers 10
Safety grid/Seals for mixer drum 11
Outlets mixing chambers 11
Radio remote control 91

Wear parts Worm pumps

Stators and Rotors D-pumps 12
Stators and Rotors L-pumps 14
Stators and Rotors other pumps 16
Mounting spray 17

You can also find other wear parts in the section "Service and Wear Parts".

Technology with value added

We are reliable partners for our customers as regards machines as well as servicing. This is demonstrated, among other things, through an

- Extensive network of sales partners
- Seamless, easily understandable technical documentation
- Skilled points of contact to answer your concerns
- Fast, uncomplicated order processing
- Short delivery times, particularly for spare parts and accessories
- Fair pricing
- Certification according to DIN ISO 9001

More reliability through vast storage capacity and fast delivery

Only with maximum availability of your machine you can work with maximum eff-ciency. Our worldwide service supports you reliably to achieve this. Thus, at our main plant in Aichtal as well as at our service s upport points, for instance, we stock large inventories with all original wear and spare parts as well as with the common accesso-ries.

As a result, we are able to deliver you the required part within a very short time.


Wear plates for M 740/760 – DC 260 (from Y.M. 2024) – DC 450/550 – EB 450/550 – EC 260 (from Y.M. 2024) – EC 350 – EC 450

Wear-resistant standard sheet metal 5 mm

	Fig.	Art. No.
Wear plate with hole	1	429 862
Wear plate front/back (2×)	2	429 864
Wear plate lengthwise (2×)	3	429 865
Wear plate incl. mounting kit		524 537

Mounting kit

	Art. No.
Flat head screw (10×)	454 147
Cap nut (10×)	033 606.002
Seal ring (10×)	018 891.007

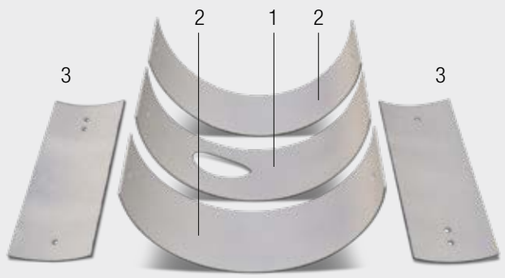


Highly wear-resistant wear plates 6 mm

	Fig.	Art. No. (6 mm)
Wear plate with hole	4	212 322.000
Wear plate front/back (2×)	5	212 321.001
Wear plate lengthwise (2×)	6	212 323.009
Wear plate incl. mounting kit		214 307.007

Mounting kit

	Art. No.
Flat head screw (10×)	031 366.001
Cap nut (10×)	033 606.002
Seal ring (10×)	543 976

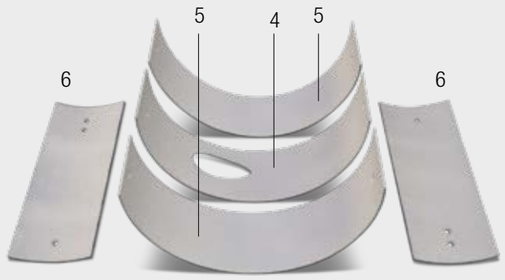


Highly wear-resistant wear plates 8 mm

	Fig.	Art. No.
Wear plate with hole	7	658 313
Wear plate front/back (2×)	8	658 314
Wear plate lengthwise (2×)	9	658 315
Wear plate incl. mounting kit		658 312

Mounting kit

	Art. No.
Flat head screw (10×)	202 194.002
Cap nut (10×)	033 606.002
Seal ring (10×)	543 976

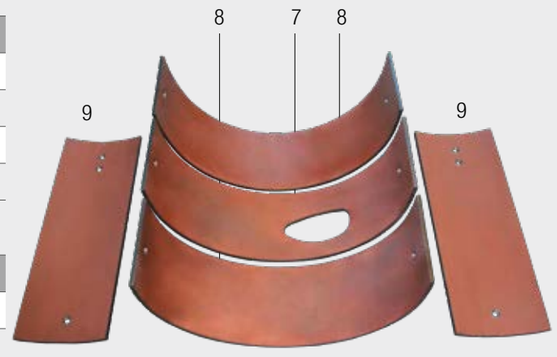

Wear-resistant standard sheet metal 5 mm

	Fig.	Art. No.
Front wear plate I (2×)	1	430 139
Front wear plate II (2×)	2	430 140
Top wear plate	3	631 282
incl. mounting kit		635 146



Wear plates for M 730

Wear-resistant standard sheet metal 5 mm

	Fig.	Art. No.
Wear plate I	3	430 208
Wear plate II	4	430 209
Wear plate incl. mounting kit		524 538

Mounting kit

	Art. No.
Flat head screw (4×)	454 147
Cap nut (4×)	033 606.002
Seal ring (4×)	018 891.007



Wear plates for M 500

Wear-resistant standard sheet metal 5 mm

	Fig.	Art. No.
Wear plate with hand hole	5	401 660
Wear plate (3×)	6	073 163.000

Mounting kit


	Art. No.
Cap nut (12×)	033 606.002
Seal ring (12×)	037 526.007



Wear plates for DC 260 (up to Y.M. 2008), EC 260

Side and lengthwise plates


	Fig.	Art. No.
Wear plate half shell A+B	1	H12 0106 0100
Wear plate lengthwise, 5 mm	2	H20 0001 5181
Wear plate lengthwise, 6 mm	2	H14 0101 1007
Mounting kit (4×) comprising: Screw, nut, washer seal		H80 6020 15

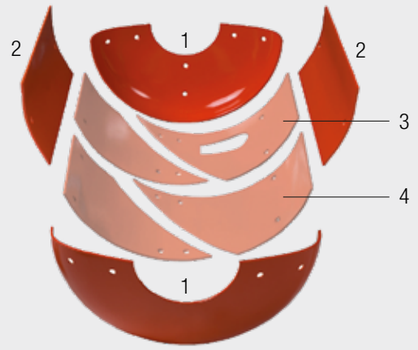

Discharge front right

Wear plates, 5 mm

	Fig.	Art. No.
Wear plate A½ divided, with discharge	3	H12 0105 0210
Wear plate A½ divided, without discharge	4	H12 0105 0200
Wear plate incl. mounting kit		H80 6010 50

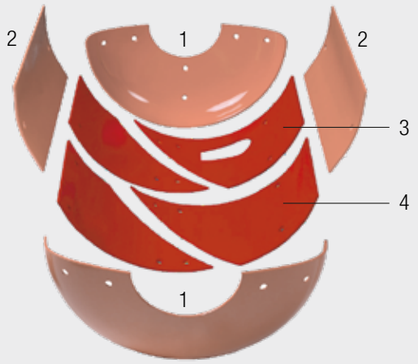


Discharge centre right

Wear plates, 5 mm (offset hole pattern)

	Fig.	Art. No.
Wear plate divided, front	5	H12 0105 0225
Wear plate divided, back	6	H12 0105 0226
Wear plate incl. mounting kit		H12 0105 0227

Straight hole pattern, acc. figure

	Fig.	Art. No.
Wear plate divided, front	5	H12 0105 0700
Wear plate divided, back	6	H12 0105 0710
Wear plate incl. mounting kit		H80 6060 50

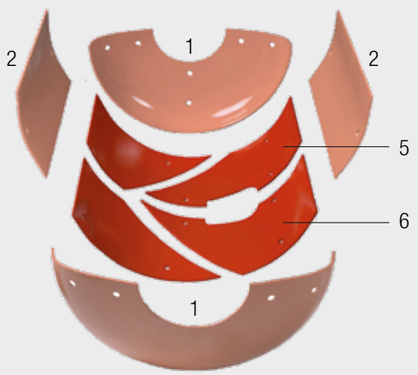

Mixers for M 3000er, M 700, M 740, M 760

Mixing blades

	Fig.	Art. No.
Mixing blade, front (1×)	1	205 305.005
Mixing blade, centre (2×)	2	205 306.004
Mixing blade, back (1×)	3	205 237.005



Mixing blade holder

	Fig.	Art. No.
Mixing blade holder, front (2×)	4	205 513.004
Mixing blade holder, back (2×)	4	205 514.003
Mounting kit mixer blade Mixokret		546 305



Mixer blade kit complete in plastic bucket

	Fig.	Art. No.
Mixer blade kit incl. mounting kit	5	206 581.006



Mixers for M 500


Mixing blades

	Fig.	Art. No.
Mixing blade, front (1×)	1	205 305.005
Mixing blade, centre (4×)	2	205 306.004
Mixing blade, back (1×)	3	205 237.005



Mixing blade holder

	Fig.	Art. No.
Mixing blade holder, outside (3×)	4	471 601
Mixing blade holder, inside (3×)	5	471 599



Mixers for EstrichBoy DC/EB/EC 260/350/450/550

Mixer complete, with screws

Outflow CENTRE EC 350 (Art.-Nr. 674 639)					
Outflow FRONT right (Art. No. H81 0100 00)					
Outflow CENTRE right (Art. No. H81 0100 10)					
	Fig.	**Art.-No.**			
Mixer blade B 1		H72 1000 1000	2×	1×	1×
Mixer blade B 3		H72 1000 3000	2×	3×	1×
Mixer blade B1 (short)	6	658 549			1×
Mixer blade B3 (short)	7	658 604			1×
Clamp BK 54		H72 0000 5400	4×	4×	4×
Clamp B 01		H72 0000 1000	4×	4×	4×
Mounting kit mixer (4×) including cover plates H72 4003 5060		544 328	1×	1×	1×



Hoppers

For current versions from Mixokret Gen. 3 / Estrichboy DC 450/550

Design	Fig.	Art. No.
D-version – A1, direction of travel, galvanised	8	580 235
D-version – A2, longitudinal, galvanised	9	580 237
D-version – A3, direction of travel (machines with silo option)		645 838
DB(S) version	10	579 732



For old versions of Mixokret and Brinkmann


Design	Art.-Nr.
Mixokret Gen. 1+2 D versions	212 667 008
Mixokret Gen. 1+2 DB(S) versions	400 818
EstrichBoy DC 260 D versions (old) – lid direction of travel	H19 2301 1051

Design	Art.-Nr.
EstrichBoy DC 260 D version (old) – lid lengthways	H19 2301 1050
EstrichBoy DC 260 DB(S) version (old)	H18 0552 0200

Safety grid and seals for mixer drum

For current versions M 740/760 from Gen. 3, M 500/700 and DC/EC 260 (from Y.M. 2024) 350/450/550

Designs	Art. No.
Safety grid and seals for mixer drum	467 189
Lid gasket for mixer drum	408 078



For old versions of Mixokret and Brinkmann

Designs	Fig.	Art. No.
Mixokret Gen. 1+2	1	418 670
DC 260/45-55 (up to Y.M. 2008)	1	H12 1208 0806
DC 260/43	1	H12 1208 0804
Seal for DC 260 (up to Y.M. 2008)	2	H42 2210 3200



Outlet mixing chamber

Mixing chamber outlet

Design	Fig.	Art. No.
Outlet Standard, 2.5"	3+6	493 599
Outlet ID 90 KKV 108	4+6	210 146.000
Outlet Mixokret, old	5+6	207 104.000
Rubber seal, 112 × 14	6	002 224.004
Outlet straight, 2.5"	7+8	H19 1705 0892
Rubber disc centric, 200 × 90 × 5	8	H42 4200 0905
Outlet straight, 3.5"	9+10	H19 1705 0950
Rubber disc centric, 220 × 180 × 5	10	H42 4200 0907




Design	Fig.	Art. No.
Outlet offset, 2.5"	11+12	H19 1705 0893
Rubber disc eccentric, 220 × 180 × 5	12	H42 4200 0906

Stators and Rotors

D-Pumps



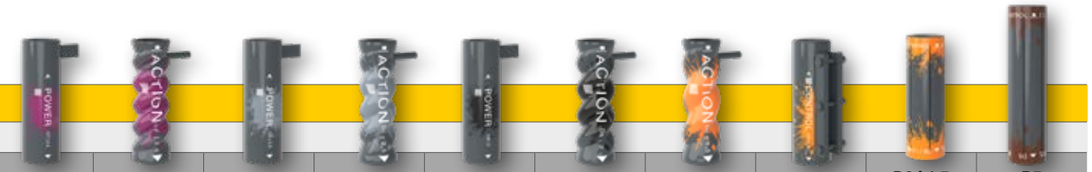


PM Description	D4 I 1/4 Power	D4 I 1/4 Action	D4 I 1/2 Power	D4 I 1/2 Action	D4 PLUS Control	D4 PLUS Control	D6 I 3 Power	D6 I 3 Action
Part no. Stator	214 573 006	786 359	214 403 008	786 360	010 313 004	010 316 001	635 718	635 709
Part no. Rotor	214 572 007		214 402 009		207 140 006	207 140 006	635 751 / 635 752	
Machine Type								
P 12	x		x		x	x	x	
MP 25	x		x		x	x	x	
S 5							x (Modification)	
Technical data								
Pressure bar	40		40		20	25	35	
Dimensions Length / Ø, mm	273 / 89		273 / 89		272 / 89	272 / 89	272 / 89	
Grain Size mm	3		3		3	3	4	
Flow Rate l/min at 400 rpm	7		15		21	21	23	
Rubber Hardness	70	65	70	65	65	72	75	65
Application								
Liquid screed I max. 40 l/min								
Liquid screed II max. 55 l/min								
Lightweight plasters						○	●	
Insulating plasters						○	●	
Lime-cement plasters P II b					○	●	●●	
Cement plasters P III a					○	●	●●	
Casing grouts	● (MP25)		○ (MP25)					
Fireproof mortars			● (MP25)			● (MP25)		
Lime plaster							●●	
Clay plaster							●● (dry)	
Fine filler	●●		○					
Scratch plasters	●●		●●		●		●	
Textured Plaster	●●		●●				○	
Gypsum-lime plasters P IV					●		●●	
Gypsum plasters P IV					●		●●	
Adhesive and reinforcement mortars	●● (Reinforcement)		●● (Reinforcement)				●● (Adhesive mortar)	

PM Description	D7 I 2,5 Power	D7 I 2,5 Action	D5 I 2,5 Power	D5 I 2,5 Action	D8 I 2 Power	D8 I 2 Action	D8 I 1,5 Action	D8 I 1,5 Control	D8 I 1,5 PLUS Control	D5 PLUS Control
Part no. Stator	786 363	786 364	206 345 006	627 353	436 746	786 365	786 366	610 494	071 011 002	070 352 005
Part no. Rotor	786 445		443 740		436 743		071 234 009			070 351 006
Machine Type										
P 12	x		x		x		x			
MP 25	x		x		x		x			
S 5	x (Modification)		x (Modification)		x (Modification)		x (Modification)			x (Modification)
Technical data										
Pressure bar	35		35		25		15			25
Dimensions Length / Ø, mm	272 / 89		272 / 89		272 / 89		272 / 89			355 / 89
Grain Size mm	4		4		4		4			4
Flow Rate l/min at 400 rpm	28		31		38		47			47
Rubber Hardness	75	65	70	65	70	65	65	62	62	62
Application										
Liquid screed I max. 40 l/min					●●					
Liquid screed II max. 55 l/min								●●		
Lightweight plasters	●●		●●		●			○		
Insulating plasters	●●		●●		●			○		
Lime-cement plasters P II b	●●		●●		●			●		
Cement plasters P III a	●●		●●					●		
Casing grouts								●● (P12)		
Fireproof mortars								●● (P12)		
Lime plaster	●●		●●							
Clay plaster	●●		●●		○					● (S5)
Fine filler										
Scratch plasters	●		●							
Textured Plaster										
Gypsum-lime plasters P IV	●●		●●							
Gypsum plasters P IV	●●		●●							
Adhesive and reinforcement mortars										

Captions ○ Less suitable ● Suitable ●● Very suitable

Rotor Head Variants

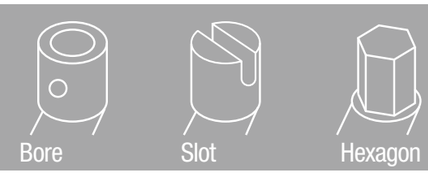

Stators and Rotors





L-Pumps

PM Description	1L6 PLUS Control	2L6 Power	2L6 Control	2L6 PLUS Control	3L7 Power	3L7 Power	2L88 Power	2L88 PLUS Control
Part no. Stator	214 536 001	430 837	213 390 002	211 355 007	213 638 007	211 503 008	483 284	203 509 007
Part no. Rotor Slot	214 537 000	211 814 001			211 278 003		211 815 000	
Part no. Rotor Bore	207 136 007	201 111 002			211 453 006		422 650	
Part no. Rotor Hexagon								
Part no. Clamping jacket	422 747			010 433 007				010 433 007
Machine Type								
S 5 EV	x (Modification)	x			x		x	
S 5 EF		x (Modification)			x (Modification)		x (Modification)	
SP 11 LMR	x (Modification)	x					x	
SP 11 THF								
SP 25 DQR	x (Modification)	x			x		x	
SP 20 GHF								
SP 25 DHF								
FHS 250								
TransMix 3.200								
Technical data								
Pressure bar	15	30			40	65	25	
Dimensions length / Ø, mm	270 / 101	540 / 101			540 / 101		540 / 101	
Grain size mm	6	6			6		6	
Flow rate l/min at 100 rpm	16	16			18		22	
Rubber hardness	55	62	55	55	50	75	55	
Application								
Liquid screed I max. 40 l/min	●	●			●		●	
Liquid screed II max. 55 l/min								
Liquid screed III max. 85 l/min								
Liquid screed IV max. 140 l/min								
Lightweight plasters	○	○			○		○	
Insulating plasters		●			●		●	
Lime-cement plasters P II b	●●	●			●		●	
Cement plasters P III a	●●	●			●		●	
Casing grouts	●●	●			●		●	
Fireproof mortars	●●	●			●		●	
Lime plaster		○			○		○	
Clay plaster	●	●			●		●	
Fine filler								
Scratch plasters	○	●			●		●	
Textured plaster	○	○						
Gypsum-lime plasters P IV								
Gypsum plasters P IV								
Adhesive and reinforcement mortars								
Concrete repair mortars	○	●			●			
Job site mixing	●	●			●		●	

PM Description	2L54 Control	2L54 Control	2L74 Power	2L74 Control	2L75 Power	2L75 Control	7515 Power	2L8 Power	2L8 Control
Part no. Stator	523 235	211 738 006	206 396 000	213 018 009	502 911	487 262	667 660	H70 0050 8312	H70 0050 8311
Part no. Rotor Slot	211 739 005		212 506 004		500 516				
Part no. Rotor Bore			206 395 001		487 261				
Part no. Rotor Hexagon							433 023	H70 0050 8021	
Part no. Clamping jacket									
Machine Type									
S 5 EV	x								
S 5 EF	x (Modification)		x		x				
SP 11 LMR									
SP 11 THF	x (Modification)		x		x				
SP 25 DQR	x		x (Modification)		x (Modification)				
SP 20 GHF							x	x	
SP 25 DHF							x	x	
FHS 250							x	x	
TransMix 3.200							x	x	
Technical data									
Pressure bar	25	35	18		15		30	20	
Dimensions length / Ø, mm	535 / 125		670 / 125		670 / 125		550 / 160	650 / 195	
Grain size mm	10	8	8		8		8	8	
Flow rate l/min at 100 rpm	35		66		89		88	143	
Rubber hardness	55	70	55		55		65	63	
Application									
Liquid screed I max. 40 l/min									
Liquid screed II max. 55 l/min	●●								
Liquid screed III max. 85 l/min			●●		●●				
Liquid screed IV max. 140 l/min							●●	●●	
Lightweight plasters	○								
Insulating plasters	○								
Lime-cement plasters P II b	○								
Cement plasters P III a	○								
Casing grouts	○								
Fireproof mortars	●		●						
Lime plaster	○								
Clay plaster	○								
Fine filler									
Scratch plasters	○								
Textured plaster	○								
Gypsum-lime plasters P IV									
Gypsum plasters P IV									
Adhesive and reinforcement mortars									
Concrete repair mortars							○	○	
Job site mixing	●		●		●		●	●	

Captions ○ Less suitable ● Suitable ●● Very suitable

Stators and Rotors








Other pumps

PM Description	N13S 1/2	N13S Grau	D3 Rot	D6-2 Rot	T 25	1,5L63	1,5L74 Blau	1,5L74 K60	1,5L8 Gelb	7515 weiss	Stator 7515 Rubber quality 65 Shore +/-5	2L8
Art. Nr. Stator	602 970	506 905	072 996 003	425 047	657 208	L920 034	207 092 002	213 027 003	070 162 004	525 052	H70 0075 1403	L920 032
Art. Nr. Rotor	602 971	506 867	072 997 002	424 846	657 207	L920 030	213 028 002	213 028 002	200 770 004	433 023	433 023	L920 033
Art. Nr. Clamping sleeve			073 487 003						073 827 003			
Machine Type												
P 12				x								
MP 10		x										
MP 12		x										
MP 15	x	x										
MP 25				x								
S 5 EV					x	x	x	x				
S 8									x			
SP 11 LMR					x	x	x	x				
SP 25 DQR					x	x	x	x				
SP 20 GHF										x	x	x
SP 25 DHF										x	x	
FHS 250										x	x	
FE 400												x
TS 3			x									
TransMix 3.200										x	x	
Technical data												
Pressure bar	30	30	25	25	20	25	15	15	15	35	35	20
Dimensions length / Ø, mm	160 / 60	160 / 60	315 / 70	202 / 89	300 / 125	540 / 101	520 / 125	517 /124	660 / 190	550 / 159	550 / 159	650 / 195
Grain size mm	3	4	4	4	8	6	8	8	10	8	8	8
Flow rate l/min b. 100 U/min	1,9	3,8			26	34	66	170	123	83	83	143
Flow rate l/min b. 400 U/min			40	26								
Rubber hardness	73	73	72	70	73	56	56	55	50	63	63	63

Captions ○ Less suitable ● Suitable ●● Very suitable

Tips & Tricks

The finer the grain size and the softer the material to be pumped, the harder the rubber quality of the stator should be.
The more granular the material and the harder the aggregate, the softer the rubber quality should be.

To simplify installation or commissioning after cleaning the machine's stator and rotor, we recommend using our PM assembly spray (part no. 508975).




Storage: Store in a dark, dry place,
lying flat at a constant room temperature (approx. 18°C)

Example calculation

Output in liters per minute with SP 11 LMR using 2L6 (250 rpm)

16 l/min at 100 rpm
16 : 100 = 0.16

0.16 x 250 = 40 l/min

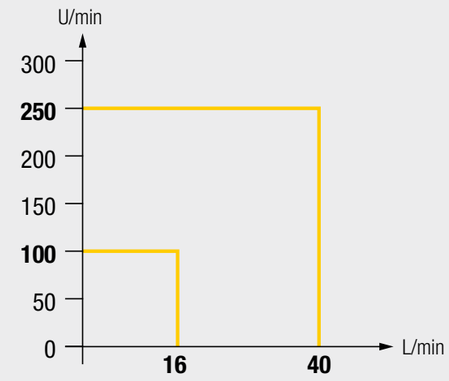

Original spare parts from Putzmeister – reliable, powerful and durable!



Power

- Maintenance-free
- Ready for immediate use
- Easy handling
- Cost-effective



Action

- Maintenance-free
- Ready for immediate use
- Easy handling
- Longer service life



Control

- Adjustable, providing longer service life
- Adaptable to different applications
- Easy installation



PLUS Control and clamping jacket

- Adjustable, providing longer service life
- Higher adaptability depending on application
- External clamping jacket can be reused repeatedly

2. Delivery Line Systems



… with high grade couplings

Features of couplings:

The hoses are assembled with TÜV-certified Kamlok couplings

- Robust male and female parts ensure long service life
- Reinforced spiral dowel pins and cam levers made of malleable cast iron ensure additional reliability and service life
- Through decoupling the couplings, 100 percent accuracy of fit is guaranteed (additional production step)
- A larger inside diameter of the nozzles reduces the risk of blockages
- Pressure resistance for PM couplings: up to 50 bar
- Pressure resistance for universal couplings: up to 10 bar
- Pressure resistance for SK couplings: up to 85 bar



Kamlok coupling



Kamlok coupling – cross-section

Delivery lines

Mortar hoses 20
Conveying hoses 26
Concrete hoses 28
Pipe clamps. 28
Hose caddy 28
Conveying pipes. 29
Priming aid, PM slurry 29
Reducers. 32

Couplings and spare parts

Cardan couplings
for mortar and delivery hoses 33
PM couplings
for mortar and delivery hoses 34
SK couplings
for concrete hoses and delivery pipes . . . 36
GEKA quick-release couplings 36
Seals. 37
Cam levers 37
Hose clips 38

Cleaning

Sponge balls 39

Comparison of a conventional hose with a hose from Putzmeister based on the example of ID 50 × 9

Technical data	conventional hose	Putzmeister hose
Inside diameter	50 mm	50 mm
Wall thickness	8 mm	9 mm
Outside diameter	66 mm	68 mm
Operating pressure	40 bar	40 bar
Safety factor	2	2.5
Number of linings	2–4	5



Hoses from Putzmeister comply with the highest safety and quality standards

- Very long service life thanks to use of abrasion-resistant rubber qualities
- Excellent buckling resistance
- High pressure resistance thanks to additional linings
- High level of safety thanks to antistatic hose construction



Mortar hoses ID 25 to 40 bar operating pressure

Technical data			
Inside diameter	25 mm	35 mm	42 mm
Weight per metre	280 g	410 g	510 g
Bending radius	150 mm	180 mm	250 mm
Operating pressure	40 bar	40 bar	40 bar

Dimensionally stable lightweight hose

Mortar hose – lightweight version – 40 bar working pressure – complete with aluminium coupling system and kink protection

Hose DN	Length	Weight	Coupling system	Art, No,
25 mm	5 m	2,450 kg	MT25-40 VT25-40	710 593
25 mm	10 m	3,650 kg	MT25-40 VT25-40	710 594
25 mm	15 m	5,250 kg	MT25-40 VT25-40	714 443
25 mm	20 m	7,000 kg	MT25-40 VT25-40	714 445
25 mm	5 m	2,500 kg	VT35 VT25-40	722 947
25 mm	10 m	3,800 kg	VT35 VT25-40	722 949



With an external threaded sleeve

Hose DN	Length	Weight	Coupling system	Art, No,
25 mm	5 m	3,100 kg	1" AG 1" AG	PE3221-105
25 mm	10 m	4,700 kg	1" AG 1" AG	PE3221-110
25 mm	15 m	6,300 kg	1" AG 1" AG	PE3221-115
35 mm	10 m	4,800 kg	2" AG 2" AG	PE3224-310
35 mm	20 m	8,900 kg	2" AG 2" AG	PE3224-320
42 mm	10 m	6,000 kg	2" AG 2" AG	PE3224-410
42 mm	20 m	11,000 kg	2" AG 2" AG	PE3224-420



Watering hose

Hose DN	Length	Weight	Coupling system	Art, No,
42 mm	10 m	6,500 kg	MT50	PE3223-411
42 mm	10 m	6,300 kg	VT50	PE3223-412

Hose elbow, including hose retaining strap

Hose DN	Length	Weight	Coupling system	Art. No.
25 mm	0.6 m		MT25-40 VT25-40	PE3200-125
35 mm	0.6 m		MT35 VT35	PE3200-135
42 mm	0.7 m		MT50 VT50	PE3200-142



Mortar hoses NW 25 to 40 bar operating pressure

Technical data	
Inside diameter	25 mm
Wall thickness	7 mm
Outside diameter	39 mm
Operating pressure	40 bar
Safety factor	2,5
Number of linings	4



Mortar hoses with couplings


Mortar hose 25 × 7, 40 bar
Male part (V) 25–40; female part (M) 25–40 with nozzle (S) 25

Length	Colour	Art. No.
5 m	black	207 803 000
10 m	black	207 804 009
10 m with 2 cam levers	black	660 847
15 m	black	211 966 001
20 m	black	207 806 007
20 m	white	531 341

Mortar hose 25 × 7, 40 bar
Male part (V) 35; male part (V) 25–40 with nozzle (S) 25

Length	Colour	Art. No.
5 m	black	207 808 005
10 m	black	207 809 004

Individual items for retrofitting	Abb.	Art. No.
PM coupling M part D 25–40 with nozzle 25	1	211 593 005
M part NW 25 mit 2 Cam levers		635 323
Seal for M part NW 25	in 1	207 764 000
PM coupling V part D 25–40 with nozzle 25	2	208 828 000
PM coupling V part D 35 with nozzle 25	2	214 800 009
Cam lever complete	3	211 535 005
Hose clip (4×) for repair	4	002 337 001




Metre goods

Mortar hose 25 × 7, 40 bar, without couplings

Length	Colour	Art. No.
40 m, on roll	black	550 283
40 m, on roll	white	531 324

Putzmeister Service – always near you

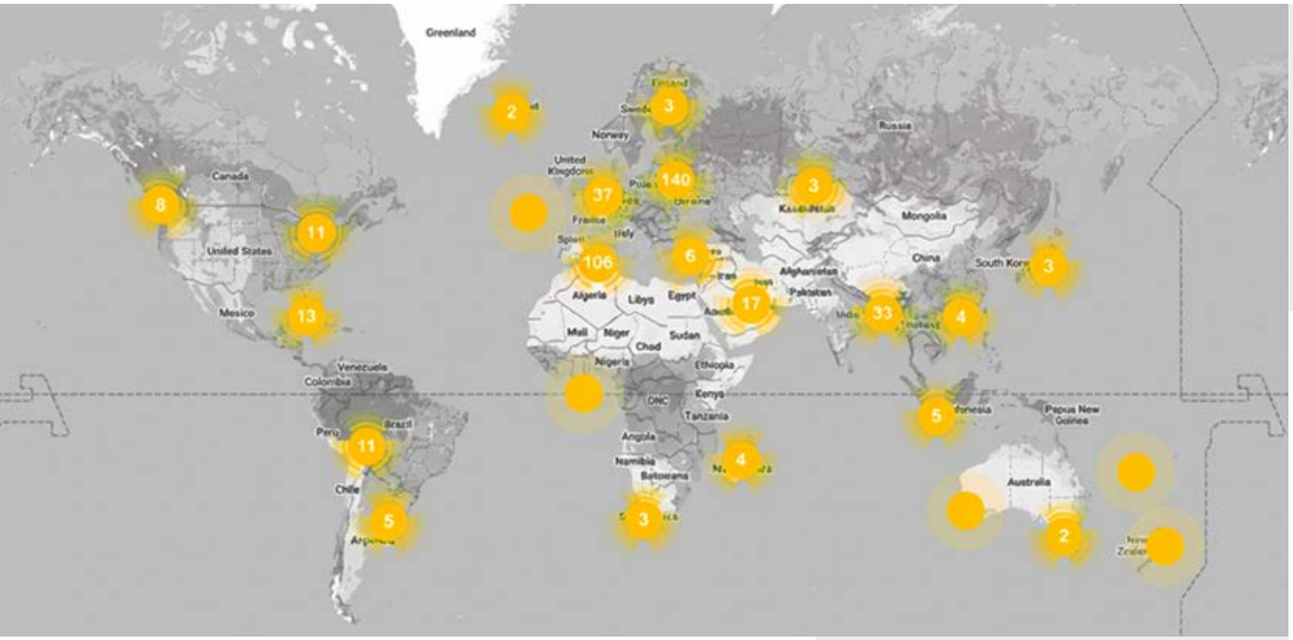

Find your nearest Putzmeister dealer here

www.pmmortar.com

The maximum availability of your machine must be guaranteed. Our reliable service team will be glad to help if the worst comes to the worst. To make sure you are not kept waiting, we work with a large network of competent service partners located all over the world.

Fast delivery of original spare parts

We have a large warehouse at our main plant in Aichtal and our service support points, where we stock all our spare and wear parts. Consequently, we can deliver all the parts you need at the drop of a hat. The same applies for our quality accessories. We always keep the most common parts from our extensive assortment in stock.

Our electronic spare part catalogue provides a comprehensive overview of all parts. Simply enter your machine number or part number to display the relevant spare parts. You can find these and other useful apps in your personal MY Putzmeister account at www.putzmeister.com.



Mortar hoses ID 35 to 40 bar operating pressure

Technical data	
Inside diameter	35 mm
Wall thickness	8 mm
Outside diameter	51 mm
Operating pressure	40 bar
Safety factor	2.5
Number of linings	4



Mortar hoses with couplings

Mortar hose 35 × 8, 40 bar
Male part (V) 35; female part (M) 35 with nozzle (S) 35

Length	Colour	Art. No.
2 m	black	070 335 006
13.3 m	black	207 615 007
13.3 m	white	531 340
20 m	black	209 950 003

Mortar hose 35 × 8, 40 bar
Male part (V) 50; female part (M) 35 with nozzle (S) 35

Length	Colour	Art. No.
13.3 m	black	207 616 006
5 m	black	722 623
20 m	black	722 624

Individual items for retrofitting	Fig.	Art. No.
PM coupling M part D 35 with nozzle 35	1	211 594 004
Seal for M part ID 35	in 1	213 725 004
PM coupling V part D 35 with nozzle 35	2	206 606 004
PM coupling V part D 50 with nozzle 35	2	207 621 004
Cam lever complete (2×)	3	211 535 005
Hose clip (4×) for repair	4	002 331 007



Metre goods

Mortar hose 35 × 8, 40 bar, without couplings

Length	Colour	Art. No.
40 m, on roll	black	550 284
40 m, on roll	white	531 326

Mortar hoses ID 40 to 40 bar operating pressure

Technical data	
Inside diameter	40 mm
Wall thickness	7.5 mm
Outside diameter	55 mm
Operating pressure	40 bar
Safety factor	2.5
Number of linings	4



Mortar hoses with couplings

Mortar hose 40 × 7.5, 40 bar
Male part (V) 50; female part (M) 50 with nozzle (S) 40

Length	Colour	Art. No.
20 m	black	H85 232.065
40 m	black	H85 232.075

Pouring hose 40 x 7.5, 40 bar
Female part (M) 50 with nozzle (S) 40

Length	Colour	Art. No.
5 m	black	645 082
20 m	black	592 814

Individual items for retrofitting	Abb.	Art. No.
PM coupling M part D 50 with nozzle 40	1	H70 5040 0000
Seal for M part ID 50	in 1	213 266 000
PM coupling V part D 50 with nozzle 40	2	H70 5140 0000
Cam lever complete (2×)	3	211 535 005
Hose clip (4×) for repair	4	H36 0213 4860



Mortar hose without couplings

Mortar hose 40 × 7.5, 40 bar, without couplings

Length	Colour	Art. No.
40 m	black	H42 0401 0010

Mortar hoses ID 50 to 40 bar operating pressure

Technical data	
Inside diameter	50 mm
Wall thickness	9 mm
Outside diameter	68 mm
Operating pressure	40 bar
Safety factor	2.5
Number of linings	6



Mortar hoses with couplings

Mortar hose 50 × 9, 40 bar
Male part (V) 50; female part (M) 50 with nozzle (S) 50

Length	Colour	Part no.
5 m	black	520 422
13,3 m	black	501 914
13,3 m	white	531 330
20 m	black	501 915
20 m	white	531 331
40 m	black	581 526
20 m system 23.5	black	701 955

Individual items for retrofitting	Fig.	Part no.
PM coupling M part D 50 with nozzle 50	1	211 595.003
Seal for M part DN 50	in 1	213 266 000
PM coupling V part D 50 with nozzle 50	2	206 604 006
Cam lever complete (2×)	3	211 535 005
Hose clip (4×) for repair	4	001 046 005
Alternative: Hose clip (4×) for repair	4	H36 0213 6076

For system 23.5	Fig.	Part no.
Coupling M part D 50 with nozzle	1	H70 5050 0000
Seal for M part DN 50	in 1	213 266 000
Coupling V part D 50 with nozzle	2	H70 5150 0000



Mortar hose without couplings

Mortar hose 50 × 9, 40 bar, without couplings

Length	Colour	Art. No.
40 m	black	501 913
40 m	white	531 327

Delivery hoses ID 65 to 10 bar operating pressure

Technical data	
Inside diameter	65 mm
Wall thickness	10 mm
Outside diameter	85 mm
Operating pressure	10 bar
Safety factor	2.5
Number of linings	4



Delivery hoses with couplings

Delivery hose 65 × 10, 10 bar
Male part (KKV) 70; female part (KKM) 70 with nozzle (S) 65

Length	Colour	Art. No.
10 m	black	456 831
10 m	white	531 329
20 m	black	456 832



Individual items for retrofitting	Fig.	Art. No.
Cardan coupling KKM 70 m. S 65	1	211 351.001
Seal for KKM 70	in 1	010 207 000
Cardan coupling KKV 70 m. S 65	2	211 352 000
Hose clip (4 ×) for repair	3	015 288 008

Delivery hoses with couplings externally pressed

Delivery hose 65 × 10, 10 bar
Male part (KKV) 89; female part (KKM) 89 externally pressed

Length	Colour	Art. No.
10 m	black	443 675
20 m	black	443 672



Individual items for retrofitting	Fig.	Art. No.
Cardan coupling KKV 89 screwed	4	213 734 008
Cardan coupling KKM 89 screwed	5	213 735 007
Seal for KKM 89	in 5	002 224 004
Screw 4 × per coupling	4+5	043 198 005
Hexagonal nut 4 × per coupling	4+5	034 105 007
Washer 4 × per coupling	4+5	037 107 002

Delivery hose without couplings

Delivery hose 65 × 10, 10 bar, without couplings

Length	Colour	Art. No.
20 m	black	490 646
40 m	black	001 685 000
40 m	white	531 328

Delivery hose 60 × 9, 10 bar, without couplings

Length	Colour	Art. No.
40 m	black	571 242

Delivery hoses ID 90 to 10 bar operating pressure

Technical data	
Inside diameter	90 mm
Wall thickness	11.5 mm
Outside diameter	113 mm
Operating pressure	10 bar
Safety factor	2.5
Number of linings	4



Delivery hose with couplings

Delivery hose 90 × 11,5
Male part (KKV) 89; female part (KKM) 89 with nozzle (S) 90

Length	Colour	Art. No.
10 m	black	455 436



Individual items for retrofitting	Fig.	Art. No.
Cardan coupling KKM 89 m. S 90	1	455 316
Seal for KKM 89	in 1	210 580 006
Cardan coupling KKV 89 m. S 90	2	455 303
Hose clip (4 ×) for repair	3	016 337 000

Delivery hose 90 × 11,5, 10 bar
Male part (KKV) 108; female part (KKM) 108 with nozzle (S) 90

Length	Colour	Art. No.
10 m	black	454 406



Individual items for retrofitting	Fig.	Art. No.
Cardan coupling KKM 108 m. S 90	1	453 504
Seal for KKM 108	in 1	210 580 006
Cardan coupling KKV 108 m. S 90	2	453 503
Hose clip (4 ×) for repair	3	016 337 000

Delivery hose without couplings


Delivery hose section 90 × 11,5, without couplings

Length	Colour	Art. No.
10 m	black	454 408

Concrete hoses

Concrete hoses

	SK 50 3"	SK 65 3"	SK 75 3"	SK 80 4,5"	SK 100 4,5"	SK 125 5,5"	PX 65 3"	PX 75 3"
Length	**Art. No.**							
2 m	481 169	536 097				027 643 000		
3 m		267 542 000	519 067	267 281 002	253 319 001	433 497	291 457 006	269 937 008
4 m	481 170		521 582	519 070	083 389 007	089 983 009		285 293 001
4.5 m		253 306 001					258 195 000	
5 m	481 171	535 521	289 261 000	267 276 004	057 609 001	057 612 001	253 868 002	262 936 006
6 m					027 623 004			
10 m	481 172	059 170 004	536 109				256 129 007	285 297 007
20 m	481 173	082 238 007						
Endhose	292 067 000 6 m	267 554 008 4 m			233 647 007 3 m	233 649 005 3 m		

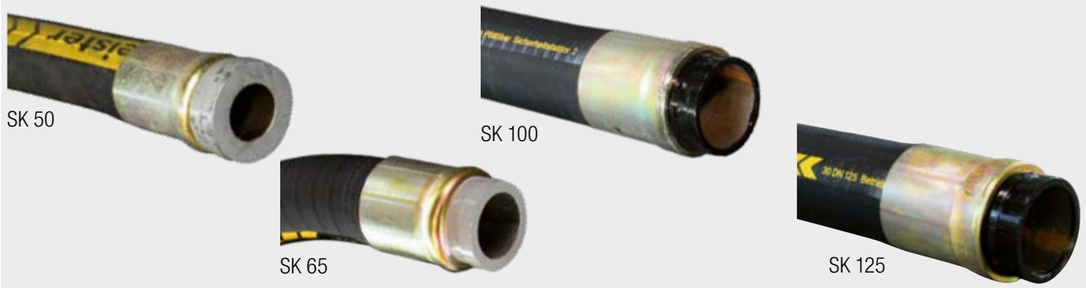

Pipe clamps

For walls and floors



	Art. No.
NW 50	023 794 005
NW 65	023 795 004
NW 100	052 930 005

	Art. No.
NW 125	051 038 005
NW 65 am Mauerwerk	275 110 000

Hose caddy

PM Hose caddy



	Art. No.
Hose caddy complete with tow hook and lashing strap	482 464
Hose caddy without tow hook and lashing strap	477 996

	Art. No.
Towing hook for hose caddy 900 x 20	501 889
Lashing strap for hose caddy 900 x 20	482 400

Delivery pipes

Delivery pipes

	SK 50 3"	SK 65 3"	SK 75 3"	SK 80 4,5"	SK 100 4,5"	SK 125 5,5"	PX 65 3"	PX 75 3"
Length	**Art. No.**							
1 m	081 783 003	057 727 006			056 861 002	056 849 008		
2 m	081 784 002	057 728 005			056 862 001	056 850 000		
3 m	081 785 001	057 729 004			056 863 000	056 851 009		
4 m						087 668 009		
6 m		222 708 009			057 601 009	057 602 008		



Delivery pipe elbow

	SK 50 3"	SK 65 3"	SK 75 3"	SK 80 4,5"	SK 100 4,5"	SK 125 5,5"	PX 65 3"	PX 75 3"
Length	**Art. No.**							
15°		057 760 005			057 595 005	057 598 002		
30°					057 594 006	258 935 008		
45°	081 779 004	057 758 004			057 593 007	057 596 004	259 941 004	424 345
90°	081 777 006	057 756 006	600 865		421 329	261 402 007	259 940 005	413 370



Pumping aids

Pumping aid

	Art. No.
PM slick-pak, 18-l-storage bucket, 25 pcs.	266 743 004
PM slick-pak, 227-g pack	265 389 003



Delivery pipes

T-delivery pipe

	SK 50 3"	SK 65 3"	SK 75 3"	SK 80 4,5"	SK 100 4,5"	SK 125 5,5"	PX 65 3"	PX 75 3"
Width	**Art. No.**							
230 mm		289 220 009			237 101 002			
300 mm					644 351			
500 mm						244 442 000		
1,000 mm	256 530 007				057 614 009	057 615 008		



Transition pieces

	Art. No.
SK125 / 5,5"– SK100 / 4,5" x 100 mm	083 460 007
PXV75 – SK65 / 3,0" x 100 mm	289 226 003
PXV75 – PXM 65 x 100 mm	289 225 004
SK65 / 3" – PXM 65 x 60 mm	253 891 008
SK65 / 3" – PXV 65 x 60 mm	253 986 007
SK65 / 3" – 3" / IG inner thread	211 293 004
SK65 / 3" – 2" / AG external thread	291 003 007
SK65 / 3" – 2,5" / AG external thread	H180 360 4100
SK50 / 3" – 2" / AG external thread	082 784 001
SK50 / 3" – 2" / IG inner thread	027 716 005

Delivery pipe accessories

	SK 50 3"	SK 65 3"	SK 75 3"	SK 80 4,5"	SK 100 4,5"	SK 125 5,5"	PX 65 3"	PX 75 3"
Shutter								
	080 389 000	080 389 000			057 627 009	057 628 008		
Cleaning port								
	081 534 003	081 534 003			276 711 000	276 591 000		PXM (Female)
					057 616 007			263 392 005
Clean-out lid								
	081 886 007	081 886 007			057 618 005	057 619 004		
Catcher								
	277 920 007	277 920 007			276 715 006	276 593 008	PXV (Male)	PXV (Male)
							279 225 001	279 230 009
Pressure gauge								
		244 408 002			521 430	521 448		
Coupling clamp								
	417 798	417 798	417 798	431 613	431 613	417 249	417 798	417 798
Gasket								
	064 084 004	064 084 004	064 084 004	057 341 000	057 341 000	055 559 001	013 154 008	230 810 002
Spring cotter								
	018 878 004	018 878 004	018 878 004	018 878 004	018 878 004	018 878 004	018 878 004	018 878 004
Coupling footed								
	437 953	437 953	437 953	457 563	457 563	534 296		
Weld Ring								
	058 684 009	057 712 008			056 795 000	056 852 008	252 547 007 (Female)	278 121 009 (Female)
							252 548 006 (Male)	278 120 000 (Male)
Sponge ball								
soft		422 531	230 227 006	230 227 006	230 227 006	230 229 004	422 531	230 227 006
middle	000 212 005			295 904 005	016 091 003	018 841 002		
hard	233 494 001	000 246 000	000 246 000		234 053 001	223 673 007	000 246 000	000 246 000
Manual gate valve								
	20 bar 493 980	20 bar 230 644 003			20 bar 239 333 001			
		130 bar 024 306 007			130 bar 222 362 005	130 bar 413 087		



Shutter



Pressure gauge

Reductions

Reduction pipes

Reduction pipe	Length	Art No.	SK 125 5,5"	SK 100 4,5"	SK 80 4,5"/4"	SK 75 3"	PXM 75 3"	SK 65 3"	PXM 65 3"	SK 50 3"
SK125 / 5,5" - SK100 / 4,5"	1.500 mm	080 617 002								
	1.000 mm	057 604 006								
	500 mm	057 603 007								
SK125 / 5,5" - SK75 / 3"	1.000 mm	416 363								
SK125 / 5,5" - SK80 / 4,5"	1.500 mm	273 860 006								
	1.000 mm	266 490 001								
	500 mm	273 864 002								
SK125 / 5,5" - PXM75 / 3"	2.000 mm	266 450 009								
SK125 / 5,5" - PXM65 / 3"	1.000 mm	274 367 003								
SK100 / 4,5" - SK80 / 4,5"	1.000 mm	259 945 000								
	500 mm	410 961								
SK100 / 4,5" - SK80 / 4"	1.000 mm	410 834								
SK100 / 4,5" - SK75 / 3"	1.000 mm	416 362								
	500 mm	418 145								
SK100 / 4,5" - PXM75 / 3"	1.000 mm	263 389 005								
SK100 / 4,5" - SK65 / 3"	2.000 mm	249 437 007								
	1.000 mm	224 269 009								
	500 mm	050 963 003								
SK100 / 4,5" - PXM65 / 3"	1.000 mm	256 246 003								
SK100 / 4,5" - SK50 / 3"	1.500 mm	238 508 002								
SK65 / 3,0" - SK50 / 3"	1.000 mm	058 670 000								
	500 mm	050 962 004								

Cardan couplings KK for hoses ID 50–90 mm

M = Female part
S = Nozzle
RI = Inside thread
V = Male part
HR = externally integrated for screwing together
RA = Outside thread

HR Cardan couplings


	Fig or similar	Art No
KKM 70 HR 50	1	213 736 006
KKV 70 HR 50	2	213 737 005
KKM 70 HR 53	3	H71 7181 0000
KKV 70 HR 53	4	H71 7182 0000
KKM 89 HR 65	1	213 735 007
KKV 89 HR 65	2	213 734 008

	Art. No.
Thread screw-in nozzle, male, 2", 8-hole	PE3257 049
Thread screw-in nozzle, male, 2½", 8-hole	PE3257 050




Cardan couplings with nozzle

	Fig or similar	Art No
KKM 70 S 50	5	H71 7250 0000
KKV 70 S 50	6	H71 7150 0000
KKM 70 S 60	5	H71 7260 0000
KKV 70 S 60	6	H71 7160 0000
KKM 70 S 65	7	211 351 001
KKV 70 S 65	8	211 352 000
KKM 89 S 65	7	455 904
KKV 89 S 65	8	455 902
KKM 89 S 90	9	065 109 001
KKV 89 S 90	10	065 108 002
KKM 108 S 90	9	453 504
KKV 108 S 90	10	453 503

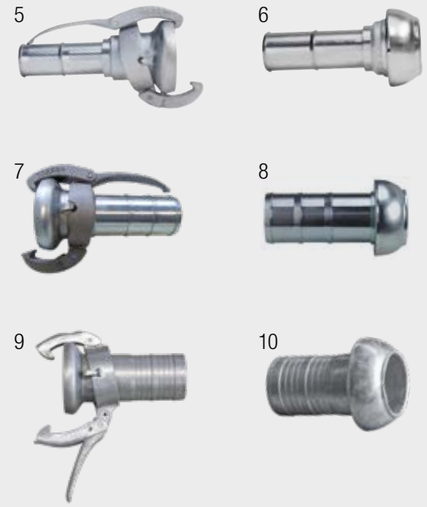

Cardan couplings with thread

	Fig or similar	Art No
KKM 70 RI 2½"	11	015 664 004
KKV 70 RI 2½"	12	015 197 005
KKM 89 RI 2½"	11	014 895 007
KKV 89 RI 2½"	12	209 205 004
KKM 89 RI 3"	11	209 325 007
KKV 89 RI 3"	12	073 443 005
KKM 70 RA 2½" with stop	13	H71 7270 2215
KKM 70 RA 2½"	13	H71 7270 2212
KKV 89 RI 3½"	11	H71 9089 2220
KKM 89 RA 2" with stop	13	214 736 005

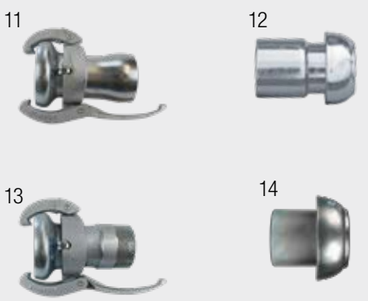

Cardan couplings KK
for hoses ID 50–90 mm (continuation)

Reducer couplings KK70 – V50

	Fig. or similar	Art. No.
KKM 70 on V 50, inside diameter 2"	1	071 790 006
KKM 70 on V 50 short, inside diameter 2.5"	2	H85 4182 00
KKM 89 on V 50 inside diameter 2"	2	435 177
KKM 108 on KKV 89		214 735 006

1



2



Putzmeister PM couplings
for hoses ID 25–65 mm

PM couplings with nozzle

	Fig. or similar	Art. No.
M 25–40 with S 25	3	211 593 005
M 25–40 with S 25, 2 cam levers	5	635 323
V 25–40 with S 25	4	208 828 000
M 25 with S 25	3	211 592 006
V 25 with S 25	4	206 608 002
M 35 with S 35	5	211 594 004
V 35 with S 35	6	206 606 004
V 35 with S 25	4	214 800 009
M 50 with S 40	5	H70 5040 0000
V 50 with S 40	4	H70 5140 0000
V 50 with S 35	4	207 621 004
M 50 with S 50	7	211 595 003
V 50 with S 50	4	206 604 006
M 50 with S 50 old BM version	7	H70 5050 0000
V 50 with S 50 old BM version	4	H70 5150 0000
M 65 with S 65	8	402 274
V 65 with S 65	4	402 289

3



4





old BM version

5



6




7





old BM version

8



M = Female part
S = Nozzle
RI = Inside thread
V = Male part
HR = externally integrated for screwing together
RA = Outside thread

Putzmeister PM couplings
for hoses ID 25–65 mm

Hose/screw-in nozzles

	Fig. or similar	Art. No.
S 20 mm RA 1"	1	211 536 004
S 25 mm RA 1"	1	205 464 001
S 35 mm RA 1½"	1	205 465 000
S 50 mm RA 2"	1	205 466 009

1



PM couplings with thread

	Fig. or similar	Art. No.
M 25–40 with RI 1"	2	211 597 001
M 25–40 with RI 1", 2 cam levers	4	637 010
M 25–40 with RI 1" aluminium rotatable	3	403 330
M 25 with RI 1"	2	211 596 002
V 25–40 with RI 1"	5	207 763 001
V 25–40 with RI 1½"	5	207 813 003
V 25 with RI 1"	5	205 117 002
M 35 with RI 1"	4	211 598 000
M 35 with RI 1 ¼"	4	H70 3535 1111
M 35 with RI 1½"	4	211 599 009
M 35 with RA 1½"	4	070 315 000
V 35 with RI 1"	5	207 618 004
V 35 with RI 1" plastic	7	203 135 002
V 35 with RI 1½"	5	070 316 009
V 35 with RI 2"	5	208 453 006
V 35 with RI 1¼"	5	207 635 003
M 50 with RI 2"	4	211 600 008
M 50 with RA 2"	8	211 848 006
M 50 with RA 2½"	6	H70 5050 2212
V 50 with RI 1"	5	207 629 006
V 50 with RI 1 1/2"	5	207 620 005
V 50 with RI 2"	5	205 273 001
V 50 with RI 2 ½"	5	210 793 000
M 65 with RI 2 ½"	4	402 288
V 65 with RI 2 ½"	9	402 290

2



3



4



5



6



7



8




9



Injection branch

	Art. No.
ID 50	015 468 006
ID 65	015 162 001



Putzmeister PM couplings for hoses ID 25–65 mm (continuation)

Reducers/adapter couplings

	Fig. or similar	Art. No.
M 25–40 for V 25	1	208 838 003
V 35 for V 25–40	2	207 795 008
V 35 for V 25	2	209 008 007
V 50 for M 35	3	213 217 004
M 50 for V 35	4	211 290 007
V 50 for end coupling	5	208 454 005
V 25-40 for GEKA	6	207 936 003

	Fig. or similar	Art. No.
M 35 for GEKA	7	070 692 008
M 50 for GEKA	7	070 266 007
1" AG for 1/2" AG	8	040 347 008
2" AG for 2" AG	8	041 644 001
2" AG for 1" IG		021 355 006
2 1/2" AG for 2" AG	8	043 160 004



Sleeve couplings


Sleeve couplings

	Art. No.
SK 3"	417 798
SK 4"	498 678
SK 4.5"	431 613
SK 5.5"	417 249

Safety split pin	Art. No.
Safety split pin	018 878 004



GEKA quick-release couplers for water hoses and air hoses



S = Nozzle
RA = Outside thread
RI = Inside thread

with nozzle (S)

	Art. No.
S 3/8"	018 535 004
S 1/2"	002 312 000
S 3/4"	001 387 007
S 1"	001 390 007

with outside thread (RA)

	Art. No.
RA 3/8"	041 403 006
RA 1/2"	014 068 009
RA 3/4"	001 386 008
RA 1"	062 815 000
RA 1 1/4"	062 861 009

with inside thread (RI)

	Art. No.
RI 3/8"	424 458
RI 1/2"	062 621 003
RI 3/4"	002 311 001
RI 1"	001 391 006
RI 1 1/4"	062 622 002

Seals

for GEKA couplings

	Art. No.
GEKA plus	413 895
GEKA	002 313 009

for PM couplings

		Art. No.
M 25–40	42 × 27 × 6	207 764 000
M 35	54 × 37 × 6	213 725 004
M 50	67 × 51× 6	213 266 000



for cardan couplings KKM

		Art. No.
KKM 70	90 × 11	010 207 000
KKM 89	112 × 14	002 224 004
KKM 108	124 × 18	210 580 006

for sleeve couplings SK

		Art. No.
SK 3"	DN 50; 65	064 084 004
SK 4.5"	DN 100	057 341 000
SK 5.5"	DN 125	055 559 001

Cam levers

Cam levers

	Fig. or similar	Art. No.
Cam lever reinforced incl. securing ring	1	211 535 005
Securing ring	1a	001 698 000
Dowel pin sets with reinforcement		
for M 25 and 35 (10×)	2	441 055
for M 50 (10×)	2	441 056
Dowel pins singly		
Spiral dowel pins for M 25 and 35	2	211 613 008
Spiral dowel pins for M 25–40	2	211 609 009
Spiral dowel pins for M 50	2	211 610 001



Hose clips

Hose clips

Clamping range Ø	Width	Art. No.
6–16 mm	8.1 mm	002 333 005
8–12 mm	7.5 mm	H36 0129 0812
11–13 mm	7.0 mm	200 651 000
16–25 mm	9.0 mm	001 423 000
16–25 mm	12.0 mm	H36 0132 1625
16–25 mm	14.3 mm	060 502 001
20–32 mm	12.0 mm	001 422 001
25–40 mm	14.3 mm	061 409 006
32–50 mm	14.3 mm	002 332 006
40–60 mm	14.3 mm	002 334 004
44–56 mm	12.2 mm	001 421 002
50–70 mm	14.3 mm	001 057 007
60–80 mm	12.0 mm	H36 0112 6080
68–85 mm	12.2 mm	062 623 001
70–90 mm	14.3 mm	061 643 008
90–110 mm	14.3 mm	060 441 007
110–130 mm	14.3 mm	061 644 007



Clamping range Ø	Width	Art. No.
34–37 mm	20 mm	415 251
37–40 mm	20 mm	466 380
40–43 mm	20 mm	466 381
56–59 mm	20 mm	492 359



Clamping range Ø	Width	Art. No.
28–35 mm	18 mm	H36 0213 2835
32–40 mm	18 mm	H36 0213 3240
39–49 mm	20 mm	H36 0213 3949
48–60 mm	24 mm	H36 0213 4860
60–67 mm	25 mm	H36 0213 6076
77–94 mm	30 mm	H36 0213 7794
94–115 mm	35 mm	H36 0213 9411



2-piece

for hoses	Ø	Width	Art. No.
ID 25	37 mm	20 mm	002 337 001
ID 25	45 mm	16 mm	001 745 005
ID 35	50 mm	25 mm	002 331 007
ID 35+40	57 mm	16 mm	001 746 004
ID 50	68 mm	25 mm	001 046 005
ID 50	66 mm	20 mm	H85 6781 00
ID 50	76 mm	19 mm	001 747 003
ID 60	76 mm	20 mm	H85 6820 50
ID 65	82 mm	20 mm	H85 6860 50
ID 65	89 mm	19 mm	402 292
Suction hose	100 mm	20 mm	002 247 007

for hoses	Ø	Width	Art. No.
ID 65	84 mm	25 mm	015 288 008
ID 90	110 mm	20 mm	016 337 000



Binding tool

	Art. No.
Bandimex tool W001	643 112
Bandimex HD adapter V050	643 114



Hose clips for binding tool

for hoses	Ø	Width	Art. No.
ID 25	45 mm	16 mm	001 745 005
ID 35+40	57 mm	16 mm	001 746 004
ID 50	76 mm	19 mm	001 747 003
ID 65	89 mm	19 mm	402 292

Cleaning accessories

Sponge rubber balls for cleaning the delivery hoses

for delivery line	Ø	Design	Art. No.
ID 18	20 mm	hard	429 483
ID 20	25 mm	medium	429 485
ID 25	30 mm	hard	000 239 004
ID 30	35 mm	hard	H42 6003 5000
ID 35	45 mm	medium	065 044 001
ID 40	50 mm	hard	H42 6005 0000
ID 50, SK 50	60 mm	medium	000 212 005
ID 50, SK 50	60 mm	hard	233 494 001
ID 60	70 mm	medium	258 320 008
ID 65	80 mm	soft	422 531
ID 65, SK 65	80 mm	hard	000 246 000
ID 90 and 100, SK 100	120 mm	soft	230 227 006
ID 90 and 100, SK 100	120 mm	medium	016 091 003
ID 90 and 100, SK 100	120 mm	hard	234 053 001
ID 125, SK 125	150 mm	medium	018 841 002
ID 125, SK 125	150 mm	hard	223 673 007



3. Application Accessories and Spare Parts



Maximum flexibility for your applications

Our machine range is one of the world's most extensive in the building sector. Therefore, you are best equipped for all requirements. However, depending on the application, you may need special accessories such as sprayers or spray guns and things that make your work easier and safer. You will find all this in proven quality, of course.

Quality accessories at the drop of a hat

If you need accessories, this involves just a mere time schedule and the question as to when the relevant part can be at the at the building site. In a very short time! This is our answer, for we have the most common parts of our extensive range in stock and deliver promptly.

No time for tedious searching
With the aid of our electronic spare parts catalogue and our machine numbers, we can quickly find just the right spare parts for you.

Everything good from a single source

The principle of "everything from a single source" is not new, but has worked well in practice. And it offers multitude of benefits: Firstly, you save time because of fewer order processes. Secondly, you get greater reliability. Because our Quality Management already starts with the critical choice of our ISO certified suppliers and their regular checks. This means maximum quality even with parts that we do not manufacture ourselves.

Quality at fair prices
And thirdly, we offer you all these benefits at the best conditions, particularly at fair prices.



Semi-dry floor screed

Discharge stands 42
Smoothing machine 44
Tools for screed layers 47
Screed layer trousers 48
Overshoes, spikes, knee pads 49

Plastering

Spray guns with nozzles 50
Compressors 54
Hopper guns 54
Water pumps 55
In-line mixers 55
Tools for plasterers 56

Concrete

Spray guns with nozzles 59
Pumping aids, PM slick-pak 59

Other application accessories

Water hoses and air hoses 60
Hose clips for air hoses 60
Pressure gauges 61
Cleaning and care products 62
Test and measurement equipment 63
Accessories General 63
Machine and working accessories 63
Cables and cable drums 65

Discharge stands

Discharge stand, 3-legged, incl. connection kit

Steel design

Connection	Art. No.
PM 50	529 740
KKV 70	529 741
KKV 89	529 742

Aluminium design

Connection	Art. No.
PM 50	529 743
KKV 70	529 744
KKV 89	529 745



Discharge stand, skid, incl. connection kit

Steel design

Connection	Art. No.
PM 50	529 746
KKV 70	529 747
KKV 89	529 748

Aluminium design

Connection	Art. No.
PM 50	529 749
KKV 70	529 750
KKV 89	529 751



Base frame and connection kits

Base frame, 3-legged	Art. No.
Steel	534 169
Aluminium	534 170



Base frame, skid	Art. No.
Steel	534 171
Aluminium	534 172



Connection kit	Art. No.
Adapter kit for PM 50	534 166
Adapter kit KKV 70	534 167
Adapter kit KKV 89	534 168



Discharge stand, steel skid KKM 108

	Art. No.
Discharge stand, skid	209 811 003



Spare parts for discharge stands

Connection adapter for discharge stand

	Art. No.	Fig.
PM 50	458 782	1
KK 70	458 783	2
KK 89	496 531	3
3" RA	669 092	4

Retaining pins for adapter

	Art. No.
PM 50	459 068
KK 70	459 069
KK 89	499 202

Other parts

	Art. No.
Rubber pot	468 004
Rubber foot (3×)	435 226
Spring cotter pin	062 187 000
Safety ring (3×)	268 561 006
Chain (1 m)	060 560 001

Reducing sleeves

	Art. No.	Fig.
3" IG on 2" AG	042 872 005	5
3" IG on 2.5" AG	043 564 008	6




Retaining pin


Rubber pot


Rubber foot

Spare parts for old generations

Brinkmann

	Art. No.
Discharge pot, black	H42 9002 5253
Rotating sleeve POM	H18 0500 3817
Rubber foot	435 226
Rubber grip	H31 9005 1010
MT 50, 2½" RI	H70 5050 2212
KKM 70, 2½" RI	H71 7270 2215

Putzmeister

	Art. No.
Discharge pot	432 252
Rubber foot	435 226
Reducing sleeve 3"–2"	042 872 005
MT 50, 2" RI	211 600 008
KKM 70, 2" RI	015 664 004


Discharge pot



Semi-dry floor screed

Self levelling floor screed

Smoothing machine EB 600 TL

Technical data	
Ø Scrapping plate	600 mm
Speed of drive shaft	125 1/min
Drive motor	1.1 kW at 125 1/min 230 V AC, 50 Hz
Total weight	42 kg

Height	min. 800 mm max. 1100 mm
Power connection	CEE-standard coupling, 16 A
Order number	111 642 000



Spare parts for smoothing machine

	Fig.	Art. No.
Protection frame top with logo	1	H28 0974 2010
Smoothing plate D 600 – standard	2	H28 0974 1847
Mounting plate/plate hub	3	H18 0175 0500
Helix cable	4	H31 8301 5900
Bracket for fastening grip	5	H28 0974 1020
Joystick control switch	6	H24 0940 3473
Rubber hand grip black (2×)	7	H31 9005 1010

Kondensatoren


	Art.-Nr.
Operating capacitor 60 MF	777 206
Starting capacitor 270-324 MF	777 215
Starting relay 230 V	777 488



* For older models Y.M. before 04/2024, please refer to Service Information SI 260203

Scrapping plate

	Fig.	Art. No.
Smoothing plate D 600 – standard	1	H28 0974 1847
Smoothing plate D 600 – flat	2	H28 0974 1846
Smoothing plate D 600 – with chamfer	3	655 127
Smoothing plate D 600 – 90°	4	664 255
Steel smoothing disc D 560		H28 0974 1857
Smoothing plate for heavy-duty design		H18 0170 0030

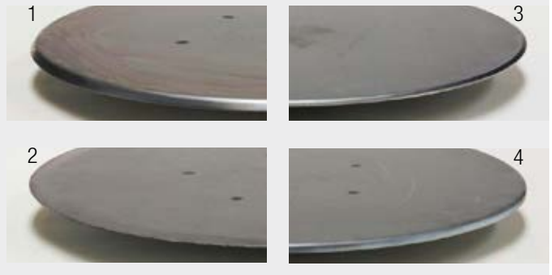

Smoothing machine GM 200 iONTRON


Technical data	
Ø Scrapping plate	600 mm
Speed of drive shaft	150/210 U/min
Drive motor	1x 56 V 12 Ah 672 Wh
Total weight	21/25 kg
Order number	111 642 010




Spare parts and accessories

Spare parts	Fig.	Art. No.
2-component handle		PE4490-343
Handle insert		PE4490-392
Flange (including screws)		PE4490-368
Quick-change mount		PE4490-572
Electric handle switch		PE4490-389
Mechanical handle switch		PE4490-384
Rubber handle		PE4490-383
Emergency stop switch		PE4490-385

Accessories	Fig.	Art. No.
EGO 56 V battery, 12 Ah, 672 Wh, 3.65 kg	4	PE5020-120
LED battery + LED holder		PE5030-100
Set of 2 x 12 Ah batteries and a carrying case		PE5020-000
EGO 56 V fast charger	2	PE5020-020
Carrying case for 5 batteries	3	PE5020-010
Standard bayonet smoothing disc, 600 mm	1	PE5041-606

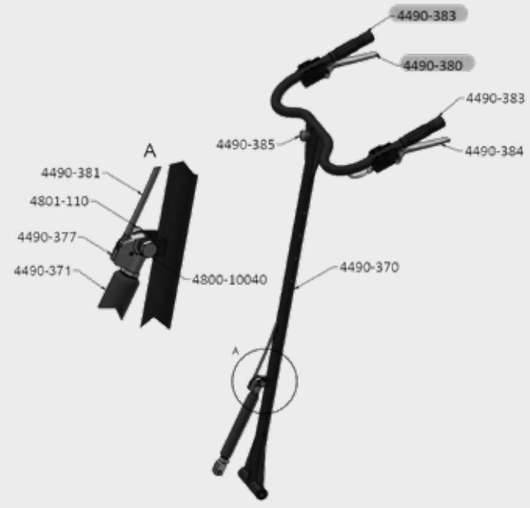


1


2


3


4

Smoothing machine GM 300 iONTRON

Technical data	
Ø Scrapping plate	600 mm
Speed of drive shaft	130/155 U/min
Drive motor	2x 56 V 12 Ah 672 Wh
Total weight	37/44 kg
Order number	111 642 010



Spare parts and accessories

Spare parts	Art. No.
2-way handle	PE4490-343
Handle insert	PE4490-344
Electric handle switch	PE4490-380
Mechanical handle switch	PE4490-384
Rubber handle	PE4490-383
Emergency stop switch	PE4490-385

	Art. No.
Rechargeable LED + LED holder	PE5030-100
Set including 2 x 12 Ah batteries and a carry case	PE5020-000
EGO 56 V battery, 12 Ah, 672 Wh, 3.65 kg	PE5020-120
EGO 56 V fast charger	PE5020-020
Carry case for 5 batteries	PE5020-010

Attachments

	Fig.	Art. No.
Pressed smoothing disc, 600 mm, high rim	1	PE5040-601
Pressed smoothing disc, 600 mm, reinforced		PE5040-602
Pressed smoothing disc, 600 mm, flat		PE5040-604
Pressed smoothing disc, 735 mm		PE5040-703

Edge smoother	Fig.	Art. No.
Quick-release flange for screw-on mounting		PE4490-365
Edge smoother attachment 608 mm, clockwise rotation	2	PE5045-608
Fine-finishing blade 600 edge smoother		PE5046-608

Wing smoother	Fig.	Art. No.
Quick-release flange for screw-on mounting		PE4490-365
Wing smoother attachment 850 mm, clockwise rot.		PE5045-850
Fine-finishing wing		PE5046-850
Smoothing disc 980 mm	3	PE5050-980



1



2



3

Tools for screed layers

Smoothing and measuring floats

with 1 horizontal level, approx. 80 × 17 mm

Width	Putzmeister Art. No.	Sola Art. No.
100 cm	PE2510-100	362 315 006
150 cm	PE2510-150	362 316 005
200 cm	PE2510-200	362 317 004
250 cm	PE2510-250	362 318 003
300 cm	PE2510-300	362 319 002

with 1 horizontal and 1 vertical level, approx. 100 × 18 mm


Width	Putzmeister Art. No.	Sola Art. No.
100 cm	PE2512-100	H75 0000 4010
150 cm	PE2512-150	524 455
200 cm	PE2512-200	524 456



Levelling tripods


with high feet for larger self levelling floor screed heights

	Fig.	Art. No.
No. 1 standard, 12 cm	1	211 703.002
No. 2 high, 14 cm	2	211 704 001



Dapling bars

Width	Ø	Handles	Fig.	Art. No.
800 mm	30	1	1	211 705 000
1500 mm	30	2	2	619 094
2200 mm	30	2	2	211 706 009
3000 mm	30	2	2	211 707 008
900 mm	50	1	1	H18 0050 0090
1500 mm	50	2	2	644864
2200 mm	50	2	2	644865

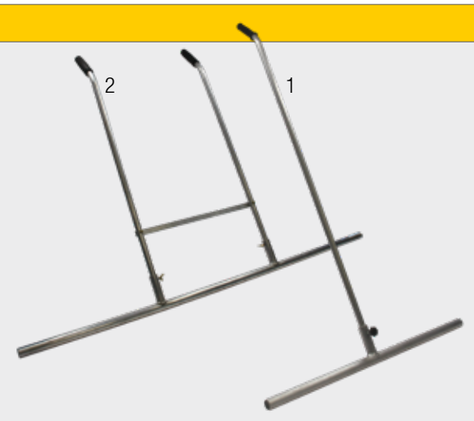

Screed Layers' smoothing trowel

Handle red, with extra long aluminium bar

	Art. No.
500 × 90 mm	362 308 000
600 × 90 mm	362 309 009
700 × 90 mm	362 310 001



Tools for screed layers (continuation)

Swiss smoother

	Art. No.
Stainless-steel, screwed on handle 500 × 130 × 0.7 mm	063 243 008



Screed layer trousers

Screed layer dungarees

Size	Art. No. (Fig. 1)	Art. No. (Fig. 2)
48	H75 0000 1148	362 347 003
50	H75 0000 1150	362 348 002
52	H75 0000 1152	362 349 001
54	H75 0000 1154	362 350 003
56	H75 0000 1156	362 351 002
58	H75 0000 1158	362 352 001
60	H75 0000 1160	362 373 006
62	H75 0000 1162	
64	H75 0000 1164	
Spare knee pads	H75 0000 1270	


1


2

Screed layer waistband trousers (continuation)

Size	Art. No. (Fig. 3)	Art. No. (Fig. 4)
44	H75 0000 1244	
48	H75 0000 1248	362 353 000
50	H75 0000 1250	362 354 009
52	H75 0000 1252	362 356 007
54	H75 0000 1254	362 357 006
56	H75 0000 1256	362 358 005
58	H75 0000 1258	362 359 004
60	H75 0000 1260	362 374 005
Spare knee pads	H75 0000 1270	


3


4

Overshoes, spikes and knee pads

Screed overshoes

	Design	Art. No.
Screed overshoes (1 pair) with feather binding, black	light	H28 0974 0980
Screed overshoes (1 pair) with rubber binding, grey	heavy	557 968
Screed overshoes (1 pair) with rubber binding, orange	heavy	H28 0974 0984
Spare belt for heavy-duty design		
front		362 771.000
back		362 772.000



Spikes

	Art. No.
for screed shoes (1 pair)	531 746




Knee pads

	Fig.	Art. No.
Harmonica	1	362 344.006
with wide protection	2	502 554
Spare belt		
Length 410 mm		362 346.004
Length 320 mm		362 345.005
Spare buttons		
Buttons – short for knee pads		H28 0974 0959
Buttons – long for knee pads		H28 0974 0960


1


2

Spray guns with nozzles

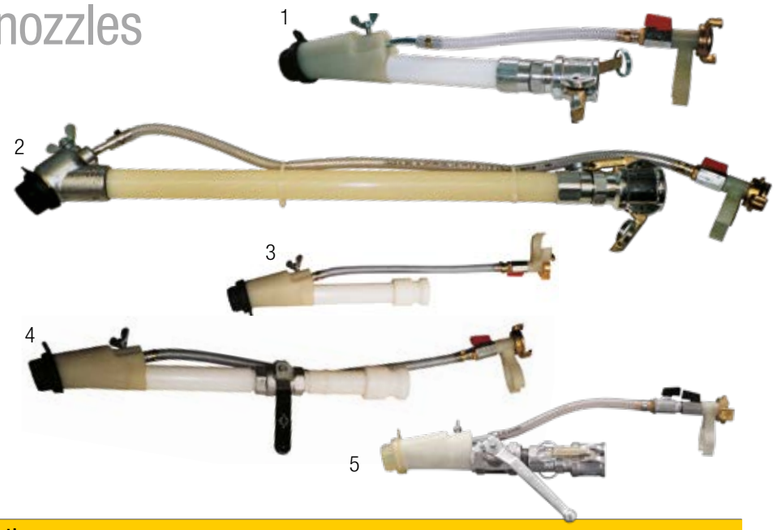

Fine plaster spray guns – made of plastic ready-mix dry mortar

Up to a grain size of 4 mm for all ready-mix dry mortar requiring reworking, e.g. gypsum plaster, cold cement plasters, etc., max. flow rate 30 l/min, air requirement approx. 200 l/min.

Fine plaster spray guns made of plastic

Nominal size	Mortar cock	Air cock	Design	Nozzle Ø	Weight	Fig.	Art. No.
M 25–40 mm with rotating coupling	yes	2	short, 300 mm	14 mm	2.4 kg	5	408 237
M 25–40 mm with rotating coupling	–	1	short, 405 mm	14 mm	1.2 kg	1	402 592 MP 25 Standard
M 25–40 mm with rotating coupling	–	1	long, 1 460 mm	14 mm	2.6 kg		403 812
M 25–40 mm with rotating coupling and angled aluminium head	–	1	long, 770 mm	14 mm	1.2 kg	2	404 479
M 25–40 mm with rotating coupling and angled aluminium head	–	1	long, 1 185 mm	14 mm	1.5 kg	2	404 361
V 35 mm	–	1	short, 285 mm	14 mm	0.6 kg	3	203 054 002
V 35 mm	yes	1	short, 450 mm	14 mm	0.65 kg	4	209 174 009

Rubber collar nozzles



Ø	Art No
18 mm	001 329 007
20 mm	001 330 009

Mortar nozzles, conical



Ø	Art. No.
10 mm	521 640
12 mm	521 641
14 mm	521 642
16 mm	521 643

Rubber fine plaster nozzles

Ø	Quality-PE Art. No.	Quality-PU Art. No.
8 mm	214 751 006	417 556
10 mm	214 752 005	417 974
12 mm	214 753 004	410 982
14 mm	214 754 003	417 554
16 mm	214 755 002	417 555



Ground plaster spray guns made of aluminium for ready-mixed wet mortar, site-made mixes

Up to a max. grain of 8 mm can be used for preparatory and base plasters as well as scraped surface and insulating plaster, primarily for ready-mix materials but also very suitable for site-made mixes. Max. flow rate of up to 40 l/min, air requirement approx. 200– 400 l/min. All 3 spray guns are in ID V 35, have 2 air cocks and 1 bore.



Ground plaster spray guns made of aluminium

Design	Nozzle Ø	Weight	Fig.	Art. No.
short, 185 mm, straight	20 and 16 mm	1.4 kg	1	001 306 004
short, 700 mm, angular	20 and 16 mm	1.5 kg	2	209 307 009
long, 1 300 mm, angular	20 and 16 mm	1.7 kg	3	209 308 008

Texture plaster spray guns

Up to a grain size of approx. 4–6 mm – for mineral spray or dispersion plasters as well as for sealing slurries, fillers etc. Flow rate of up to 10 l/min, air requirement 400– 800 l/min.




Texture plaster spray guns

Nominal size	Nozzles Ø	Weight	Art. No.
M 25 mm	4, 6, 8 mm	2.2 kg	071 473 006
M 25–40 mm	4, 6, 8 mm	2.2 kg	208 751 009

Spray nozzles for texture plaster spray gun

Ø	Art. No.
4 mm	000 225 005
6 mm	000 227 003
8 mm	000 229 001
9 mm	000 230 003
10 mm	000 231 002



Material nozzles for texture plaster spray gun

Ø	Diameter Design	Art. No.
12 mm	air holes Ø 3 mm – red	206 734 002
12 mm	air holes Ø 2 mm – silver	206 751 001



Spray guns with nozzles (continuation)

Refurbishing spray gun

Up to grain size of 6 mm for mineral-based plasters for refurbishing, for concreting with ring nozzle and flexible spray pipe.



Spray nozzles for texture plaster spray gun

	Art. No.
ID 1", Ø 12 mm nozzle, RI 1" AG, weight 1.2 kg	207 283 002
ID V 35/RI 1" coupling connection – plastic	203 135 002
ID M 25–40/RI 1", coupling connection	211 597 001

Nozzle pipe Vulkollan	Art. No.
Ø 15 mm	207 286 009
Ø 12 mm	207 285 000


Application nozzles

	Art. No.
RI 1"/GEKA mortar application nozzle 160 mm wide	071 566 007



Crevice and frame filling devices

Nozzle nominal size		Fig.	Art. No.
DN 10	crevice device with tangent. Spray head, crevice nozzles, rotating coupling M 25–40	1	415 689
DN 25	frame filling device with ball cock, rotating coupling M 25–40, acc. Fig., 20 m E-remote control cable (for MP + Sprayboy)	2	214 236 000
	Remote control cable connector plug and switch, 20 m long	4	214 254 008
DN 25	Frame filling hose with coupling M 25–40, 30 cm long	3	408 373
	E-remote control with On/Off switch (connector plug), 20 m	4	269 446 007
	E-remote control cable with connector plug for extension 30 m	4	211 507 004
	E-remote control cable with connector plug for extension 20 m, 3 × 0,75	4	211 506 005
	E-remote control cable with connector plug for extension 10 m, 3 × 0,75	4	211 505 006

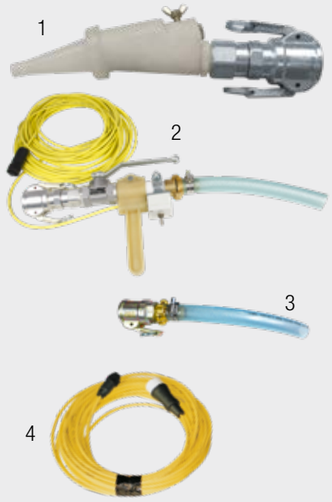

Glue gun (carrying case kit)

	Art. No.
For PM coupling consisting of: Glue gun cpl., toolbox 410, cleaning brush D, grease gun – small, adapter cable 4P Harting/ Binder, with PM coupling	408 422
In addition we recommend:	
20 m remote control cable	211 506 005



Injection lances

	Art. No.
Injection lance cpl. with T-piece, pressure gauge, remote control air cock, coupling with nozzle pipe ID 50, expanding collar D 45 and mounted collar D 38	001 128 004
Injection lance as above, but without T-piece, without pressure gauge and without remote control cock, connection V 35/RI 1"	001 133 002
Expanding collar D 38	070 344 000
Expanding collar D 45	070 345 009



Compressors

POLY compressor

	Art. No.
Compressor, 250 l/min, 400 V/50 Hz, 3-phase with cut-out (MP series)	663 700



Compressor

	Art. No.
Compressor, 200 l/min, 400 V/50 Hz, 3-phase, with cut-off (MP series)	487 420
Compressor, 180 l/min, 230 V/50 Hz, 1-phase, with cut-off (MP series)	481 087



Compressor HANDY

	Art. No.
Compressor HANDY, 250 l/min, 400 V/50 Hz, 3-phase	000 235 008
Compressor HANDY, 250 l/min, 230 V/50 Hz, 1-phase	000 215 002
Compressor HANDY, 250 l/min, 230 V/60 Hz, 3-phase	209 975 004



Hopper guns

Hopper guns with accessories

	Art. No.
Hopper gun cpl. with air hose in box	207 307 001
Hopper gun without hose and packaging	210 014 006
Air hose with EWO plug-in connectors, 10 m	209 345 003
Air hose with EWO plug/GEKA coupling	207 958 007
Holder for hopper gun	206 766 009
Elbow	001 430 006



Water pumps

Booster pumps

	Art. No.
Auxiliary water pump, self-priming with check valve in the suction line, 230 V/50 Hz, 0.33 kW, 3.4 m³/h, max. pumping pressure 6 bar	423 324
Auxiliary water pump, self-priming with check valve in the suction line, 400 V/50 Hz, 0.33 kW, 3.4 m³/h, max. pumping pressure 6 bar, with Hart connector	422 097
Auxiliary water pump, self-priming with check valve in the suction line, 400 V/50 Hz, 0.33 kW, 3.4 m³/h, max. pumping pressure 6 bar, with CEE connector	435 229
Water pump 3.4 m³/h self-priming with automatic switching mechanism, 230 V/50 Hz, 0.75 kW, water-protected IP 65, with check valve in the suction line	429 706

Remixers

	Art. No.
Uni remixer without collar nuts (Accessories: see Rotors with Pins)	400 566
Cross shaped mixing paddle for uni remixer	400 580
Collar nut (2×)	208 801 001
Tie rods for uni remixer (2x)	660 841
PM coupling V 35/25–40 reduced	207 795 008
Flow pressure gauge 0–60 bar for hoses ID 25–40	214 570 009
Flow pressure gauge 0–60 bar for hoses ID 35–40	472 506



Tools for plasterers


Alu H-shaped float

Profile 114 × 50 × 28	Art. No.
Length 1.0 m	000 190.004
Length 1.2 m	000 191.003
Length 1.5 m	000 192.002
Length 1.8 m	000 193.001
Length 2.0 m	000 194.000




Alu trapezoidal float

Profile 97 × 17 mm	Art. No.
Length 1.0 m	000 195.009
Length 1.2 m	000 196.008
Length 1.5 m	000 197.007
Length 1.8 m	000 198.006
Length 2.0 m	000 199.005



Alu float

with wooden handle	Art. No.
Length 1.2 m	000 202.002
Length 1.5 m	000 200.004



Nozzle cleaner

	Art. No.
Nozzle cleaner D = 4 mm	064 073.002



Assembly spray


Mounting aid for rotor-stator	Art. No.
Silicon spray, 400-ml aerosol	508 975



Smoothing trowels

Steel design	Art. No.
280 × 130 mm	362 311.000
280 × 140 mm, Nirosta	063 245.006

Plastic design	Art. No.
280 × 140 × 3 mm	363 150.008

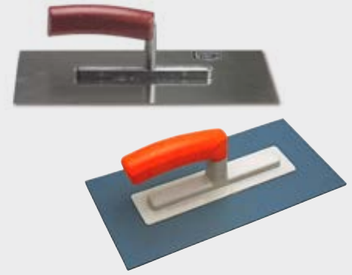

Finishing spatula

	Art. No.
350 mm	531 714
500 mm	362 362.004



Ceiling saw/plasterer's saw

	Art. No.
320 mm	063 231.007



Floats

Plastic design, 280 × 140 mm	Art. No.
coarse pore	063 236.002
fine pore	531 759
Spare cover, coarse pore	063 235.003
Spare cover, fine pore	531 760

Polyurethane design	Art. No.
280 × 140 mm	363 180.007
320 × 180 mm	363 181.006
420 × 220 mm	362 312.009
480 × 240 mm	362 313.008





Tools for Plasterers (continuation)

Aluminium plasterer's plane

500 × 85 mm	Art. No.
with 8 blades	063 234 004




Mesh scraper

galvanised	Art. No.
285 × 140 mm	063 240 001
370 × 170 mm	363 165 006



Bricklayer's trowel

stainless steel – with straight neck	Art. No.
180 mm	063 375 002



Plasterer's trowel

stainless steel	Art. No.
70 mm	064 071 004
100 mm	363 164 007



Corner spatula

stainless steel – for inside	Art. No.
80 × 60 × 60 mm	063 247 004



Stainless plaster scraper

pointed shape	Art. No.
180 × 90 mm	531 744



Spray guns with nozzles

Concrete spray nozzles made of plastic

DN	Air valve	Cock acc.	Nozzles Ø	Weight	Art. No.
V 50 mm	1	2	30 mm	3.5 kg	651 567
Spare nozzle for V 50					413 084
Nozzle mouthpiece					413 085
Hose clip					061 644 007

1



High-pressure concrete spray gun

	Weight	Fig.	Art. No.
Concrete spray gun 1.5" with rubber nozzle ID 35/PM35		2 similar	718 163
Concrete spray gun 2" with rubber nozzle ID 50	3,8 kg	2	532 589
Spare nozzle for ID 50			532 590
Spare nozzle for ID 50, hard			AST23674
Housing for concrete spray gun			669 867
Gasket set for concrete spray gun			644 644
Complete air control			670 260
Concrete spray gun 3" with rubber nozzle SK65	8,7 kg	3	625 697
Spare nozzle SK 3"			610 394

2



3



Pumping aids

	Art. No.
PM slick-pak, 18-l-storage bucket, 25 pcs.	266 743 004
PM slick-pak, 227-g pack	265 389 003



Water hoses and air hoses

Water hoses ¾"

	Length	Art. No.
with GEKA coupling ¾"	40 m	755 504
Hose per meter without coupling, ID 19 × 3,5 up to 15 bar operating pressure		755 503



Water and air hoses ½"

	Length	Art. No.
with GEKA coupling ½"	10 m	755 460
with GEKA coupling ½"	15 m	755 458
with GEKA coupling ½"	20 m	755 459
with GEKA coupling ½"	30 m	755 414
with GEKA coupling ½"	40 m	755 252
Hose per meter without coupling, ID 13 × 3,5, up to 15 bar operating pressure		755 253
Meterware, NW 13 × 4, up to 20 bar operating pressure		206 433 002
Spray nozzle, with ½" GEKA coupling, lockable		042 419 002



Hose clips

for air hoses

for hoses Ø	Length	Art. No.
15–17 mm	8 mm	002 328 007
17–20 mm	8 mm	002 329 006
20–23 mm	8 mm	002 330 008



Hose connector

for mortar and air hoses

for hoses Ø	Width	Art. No.
25 mm	13 mm	214 579 000



Pressure gauges

Pressure gauges for ID 50

		Art. No.
with coupling V 50/grease buffer	0–6 bar	011 729 008
only pressure gauge	0–6 bar	001 245 000
with coupling V 50/grease buffer	0–10 bar	011 730 000
only pressure gauge	0–10 bar	001 246 009
with coupling V 50/grease buffer	0–25 bar	426 387
only pressure gauge	0–25 bar	426 370
with coupling V 50/grease buffer, Ø 60 mm	0–40 bar	420 989
with coupling V 50/grease buffer	0–100 bar	426 388
only pressure gauge	0–100 bar	426 369
T-piece for pressure gauge ID 50 mm		071 554 006



Pressure monitor and pressure gauge

	Art. No.
Pressure monitor cpl. with grease buffer 2–32 bar	011 757 009
Protective cap for pressure gauge NG 100	001 252 006
Air test pressure gauge 1", T-piece 0–6 bar, with GEKA coupling	001 160 004
Test pressure gauge with 1" hose cock ID 25	014 375 006
Test pressure gauge with 1" hose cock ID 25–40	208 745 002
Flow pressure gauge 0–60 bar for hoses ID 25–40	214 570 009
Flow pressure gauge 0–60 bar for hoses ID 35–40	472 506



Cleaning and care products

Grease guns and grease

	Fig.	Art. No.
Hand lever grease gun with hose	1	000 211 006
Grease gun, small (S 5)	2	000 112 008
Filling pump, manually operated	3	210 075 003
Filling pump, manually operated, with 90° angle for M 740/4	4	590 315
Grease cartridges with high performance grease, 400 g	5	000 113 007
Multi-purpose grease KL 2K-30, 4.5 kg	6	H60 5150 0030



Cleaning brushes

	Art. No.
Cleaning brush, approx. 48 cm	000 100 007
Hand brush "Brinkmann"	H75 0000 1070



Spray gun

	Art. No.
PM Spray gun incl. 5 m hose	000 210 007



Care product

	Art. No.
biodegradable, 20-kg canister	410 139



Gloves

		Art. No.
Neoprene gloves (1 pair)	Size 8	658 458
Neoprene gloves (1 pair)	Size 9	H75 0000 1026
Neoprene gloves (1 pair)	Size 10	648 875
Neoprene gloves (1 pair)	Size 11	658 459



Test and measurement equipment

Vessel testing device

	Art. No.
with silencer	486 615



Frequency measuring device

	Art. No.
For checking the belt tension on the V/ribbed or toothed belt	466 768



Wall thickness measuring device

	Art. No.
Wall thickness measuring device, digital	277 434 001



Accessories General

Hose holder for the attachment of hoses

	Fig.	Art. No.
Hose holder, leather	1	000 206 008
Hose holder, textile	2	H20 0000 1207



Safety helmet


	Art. No.
Safety helmet, yellow, with PM imprint	064 626 006



Machine and working accessories

Chocks and holders

	Art. No.
Chock, sheet steel 636	015 006 002
Holder for 636	061 362 004
Chock, plastic UK 10	415 904
Holder for UK 10	415 905
Chock, plastic UK 36	484 954
Holder for UK 36	484 956



Trailer lighting

	Art. No.
Light set, 13-pin connector, 12 V	682 173
Light set, 1 m wide, 6 m cable, 7-pin connector, 12 V	207 525 003
Light set, 1 m wide, 6 m cable, 7-pin connector, 24 V	209 028 003



Vehicle cable adapter

	Art. No.
13- to 7-pin connector, 12 V	437 679
7- to 13-pin connector, 12 V	248 012 009



Licence plate bracket

	Art. No.
with hinged frame	362 732 003



Theft protection

	Art. No.
for spherical head coupling	H22 4696 1000



Cables and cable drums

Connecting site cable to power supply

	Art. No.
Extension cable 16 Amp., 230 V 3 × 2.5 mm², 20 m	212 960 006
Extension cable 16 Amp., 400 V, 5 x 2.5 mm² , 30 m	430 516
Connecting site cable with CEE connector, 16 Amp., 10 m, 5 × 2.5 mm²	211 457 002
Connecting site cable with CEE connector, 16 Amp., 25 m, 5 × 2.5 mm²	214 592 003
Connecting site cable with CEE connector, 32 Amp., 50 m, 5 × 2.5 mm²	062 921 004
Connecting site cable with CEE connector, 32 Amp., 25 m, 5 × 4 mm²	062 922 003
Connecting site cable with CEE connector, 32 Amp., 50 m, 5 × 4 mm²	062 923 002
Extension cable 32 Amp., 400 V, 5 x 6 mm² , 30 m	430 518
Solid rubber distributor IP54 63A for 32A+16A	658 971
Connection cable CEE 63A 16 mm², 20 m	722 237



4. Service and Wear Parts





Designed repairable for long value preservation

When designing our machines we concentrate on optimum service and maintenance features. For the easier it is to access all components, the less time and money is incurred for additional work making repair work worthwhile longer.

Maximum service life down to the last detail

All materials and components of our machines have maximum service life and wear resistance. For example: the hoods of our new machines are made of high-strength, impact-resistant plastic. The P 720 and P 730 have hard chrome-plated cylinders as well as a wear plate made of hardened steel.

Extending service life with regular maintenance
With regular maintenance and original wear and spare parts you preserve the value of your Putzmeister machine while additionally extending their service life. Our service and maintenance kits help you to achieve this and offer additional, attractive cost benefits.



Service and maintenance kits for the latest generation of machines

Overview of service packages. 68
M 740 / M 760 70
DC 260-45 (55) 72
SP 11 74
SP 25 DQR 76
SP 25 DHF / FHS 250 78
S 5 EV/TM 80
MP 25. 82
P 720 / P 730 84
P 13 86
SP 20 GHF/2. 90

Remote controls

Remote controls. 91

Service Package Overview

Service and maintenance packages — Putzmeister

Putzmeister

after	M 740/5 M 760/5	M 740/4	M 740/3	M 740/2	M 760/5 Kubota	M 760/4	M 760/3	M 760/2
50 h	701 328	600 433		422 656	642 882	600 433		422 262
100 h			580 492				580 492	
400 h					642 910			
500 h	700 520	598 375	493 689	422 657		600 434	502 366	422 263
800 h					642 936			
1000 h	700 549*	598 376	504 208	422 658		600 435	504 207	422 264
	770 419**							
	793 975***							

* Rotorcomp compressor up to Y.M. 08/24
** Rotorcomp compressor up to Y.M. 09/24
*** BOGE compressor up to Y.M. 01/26

after	P 720/730 Deutz	P 720/730 Hatz	P 715/718	P 13 DMR*
50 h			657 031	
200 h				656 984
500 h	715 790	732 935	657 032	
1000 h	715 792	732 980	657 033	

* For Lombardini engine

after	SP 11*	SP 25 DQR	FHS 250 / SP 25 DHF	FE 400 / SP 20 THF	SP 20 GHF	SP 20 GHF-2
50 h	658 758	719 451	719 451	650 104	650 119	732 590
125 h					650 120	650 120
200 h	658 759			650 108		
400 h	658 761	719 450	719 450			
500 h				650 111	712 762	732 594
800 h		719 449	719 453			

* Beliso BMR, BMT, BMB, BUR, BHF, LMR, TML, THF

Service and maintenance packages — BRINKMANN

Brinkmann

after	DC 450/5	DC 450/4	DC 450	DC 550	DC 260/45 (55) (up to Y.M. 2008)	DC 260/45 (55) (from Y.M. 2024)*
50 h	709 970	690 930			H80 0010 50	709 970
100 h			580 492	580 492		
500 h	709 971	690 931	H87 1031 9100	H87 1031 9100	H80 0010 51	709 971*
1000 h	709 972	690 932	H87 1031 9101	H87 1031 9102	H80 0010 52	709 972*

* At export Version (non-eu)
AN 765 954 – 500 h
AN 765 955 – 1000 h

after	FHS 200/3	EC 350**	EC 450 (up to Y.M. 2020)	EC 450 (from Y.M. 2022)	EC 260/45 Duo	EC 260/35 Quattro
50 h	H87 2040 9100					
500 h	H87 2040 9105	669 302	H87 1031 9103	740 078	740 078	740 078
1000 h	H87 2040 9110	669 305**	H87 1031 9104	740 077	791 648*	791 648

* Before Y.M. 08/2025 AN 740 077
** Up to Y.M. 05/2018: 1000 h Art.Nr. 669 313

Service and Wear Parts
M 740/5 Stage V – M 760/5 Stage V

Maintenance package


Mixokret M 740/5 Stage V & M 760/5 Stage V	**Rotorcomp**	**Boge**
	Art. No.	**Art. No.**
Service package M 740/760 Stage V "50h"	701 328	701 328
Service package M 740/760 Stage V "500h"	700 520	700 520
Service package M 740/760 Stage V "1000h"	700 549 up to 08/24 770 419 up to 12/25	793 975 from 01/26

Contents of maintenance package

		Fig.	**Art. No.**	**Art.-Nr.**	**1000 h**	**500 h**	**50 h**
Oil filter	Deutz engine	1	214 311 006	214 311 006	1×	1×	1×
Fuel spin-on filter	Deutz engine	2	700 422	700 422	1×	1×	
Fuel pre-filter	Deutz engine	3	700 421	700 421	1×	1×	
Air filter element	Deutz engine	4	700 425	700 425	1×	1×	
Air filter secondary element	Deutz engine	5	700 426	700 426	1×	1×	
Fan drive V-belt	Deutz engine	6	700 679	700 679	1×		
Narrow V-belt	Deutz engine	7	700 550	700 550	1×		
Air filter element	Compressor		422 505	422 505	1×	1×	
Oil filter	Compressor	8	595 729	690 936	1×		1×
Air/oil separator element	Compressor	9	595 726 (2×)	672 895 (1×)	(2×)(1×)		
Filter element 25 µ (up to Y.M. 08/24)	Hydr.tank	10	433 980		1×		
Filter element 10 µ (from Y.M. 09/24)	Hydr.tank	10	771 334	771 334	1×		

Functional fluids


	Unit	**Note**	**Art. No.**
Compressor oil	pcs.	1 pc. = 20 l canister	687 329
Engine oil	l	20 l = 1 canister	623 988

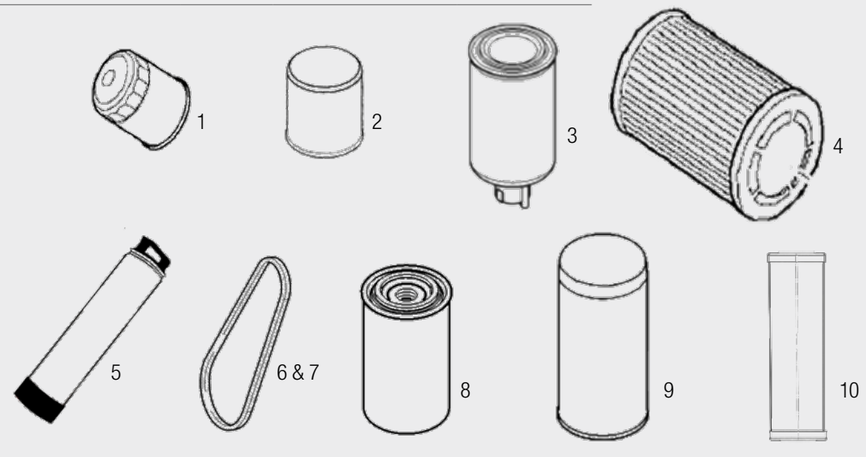

Wear parts and spare parts


Wear plate set for standard chamber (Art. No. 524 537*)

	Fig.	**Art. No.**
Wear plate with hole	1	429 862
Wear plate front/back (2×)	2	429 864
Wear plate lengthwise (2x)	3	429 865




Mixer blade kit in Putzmeister bucket (Art. No. 206 581 006)

Mixing blade, back (1×)	4	205 237 005
Mixing blade, centre (2×)	5	205 306 004
Mixing blade, front (1×)	6	205 305 005
Mixing blade holder, front (2×)	7	205 513 004
Mixing blade holder, back (2×)	8	205 514 003
Mounting kit (1×)		546 305
Mixer shaft	9	497 811

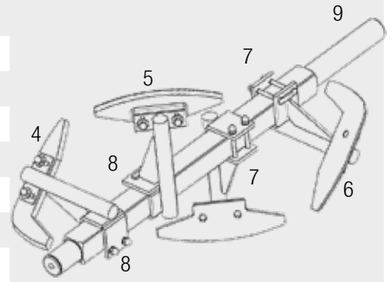


Other parts for mixing vessel

Lid gasket for mixing vessel	10	408 078
Safety grid for mixing vessel	11	467 189




Hopper – galvanised

A2 lengthwise	12	580 237
for DB(S) versions	13	579 732

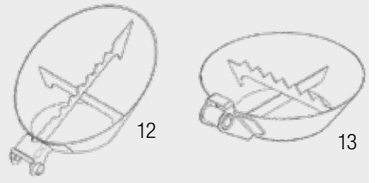


Mixing chamber outlet

Complete connection inc. mounting kit	14-17	489 819
Wear connection ID65	14	493 599
O-ring	15	002 224 004
PM coupling MT35 – female part	16	211 599 009
Coupling part KKV70 – male part	17	015 197 005
Alternative: Coupling part KKV89 – male part	17	209 205 004

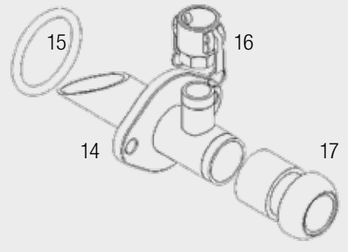

Parts for feeder

Complete stop for scraper cable	18-20	212 866 009
Stop for scraper cable	18	212 884 001
Washer for stop	19	212 885 000
Dowel pin	20	038 261 002
Scraper cable **D8 mm** x 12000	21	629 197
Alternative: Scraper cable **D6 mm** x 12000	21	645 845
Option: Protective plate for loading hopper	22	564 040
Complete protective plate inc. assembly parts		564 042

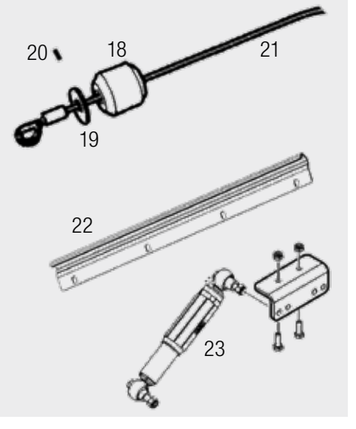

Option 100 km/h

Conversion kit from 80 km/h to 100 km/h	23	681 755

*inc. mounting kit

** Further plates on page 6

Service parts
DC 260-45(55) Stage V / non eu


Maintenance package

EstrichBoy DC 260-45(55) Stage V — **non eu (Export)**

	Art. No.	Art. No.
Service package DC 260-45(55) Stage V "50h"	709 970	709 970 (non-eu)
Service package DC 260-45(55) Stage V "500h"	709 971	765 954 (non-eu)
Service package DC 260-45(55) Stage V "1000h"	709 972	765 955 (non-eu)

Contents of maintenance package


		Fig.	Art. No.		1000 h	500 h	50 h
Oil filter	Deutz engine	1	214 311 006	214 311 006	1×	1×	1×
Fuel spin-on filter	Deutz engine	2	700 422	700 422	1×	1×	
Fuel pre-filter	Deutz engine	3	700 421	700 421	1×	1×	
Air filter element	Deutz engine	4	422 505	700 425	1×	1×	
Air filter secondary element	Deutz engine	5	600 565	600 565	1×	1×	
Narrow V-belt	Deutz engine	6	700 550	700 550	1×		
Air filter element	Compressor		E21 018	700 426	1×	1×	
Oil filter	Compressor	7	690 936	690 936	1×		1×
Oil trap	Compressor	8	672 895	672 895	1×		
Nozzle with sintered metal filter	Compressor	9	691 150	691 150	1×		
Filter element 10 µ	Hydr. tank	10	661 648	661 648	1×		

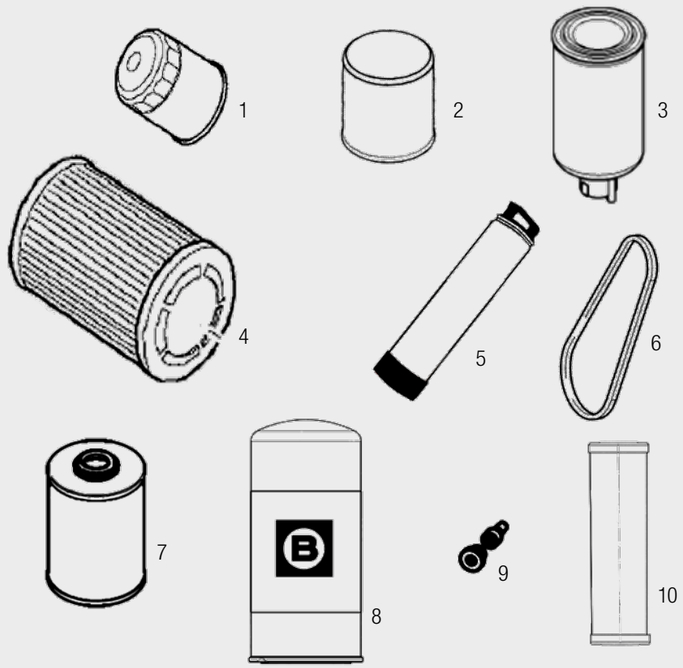

Wear parts and spare parts


Wear plate set for standard chamber (Art. No. 524 537*)

	Fig.	Art. No.
Wear plate with hole	1	429 862
Wear plate front/back (2×)	2	429 864
Wear plate lengthwise (2x)	3	429 865




Mixer blade kit

Outflow FRONT right (Art. No. H81 010 000)				
Outflow CENTRE right (Art. No. H81 010 010)				
Mixer blade B1	4	H72 1000 1000	2×	1×
Mixer blade B2	5	H72 1000 3000	2×	3×
Clamp B01	6	H72 0000 1000	4×	4×
Clamp BK54	7	H72 0000 5400	4×	4×
Mounting kit		544 328	1×	1×
Mixer shaft	8	497 811		

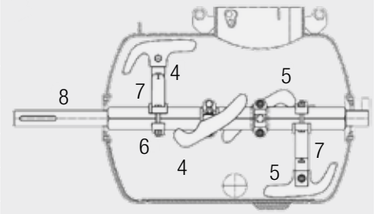


Other parts for mixing vessel

Lid gasket for mixing vessel	9	408 078
Safety grid for D version	10	467 189
Safety grid for DB DBS version	10	673 165




Hopper – galvanised

A1 crosswise	11	580 235
A2 lengthwise	12	580 237
A3, left attachment	13	645 838
for DB(S) versions	14	579 732




Mixing chamber outlet

Complete connection inc. mounting kit	15-18	489 819
Wear connection ID65	15	493 599
O-ring	16	002 224 004
PM coupling MT35 – female part	17	211 599 009
Coupling part KKV70 – male part	18	015 197 005



Parts for feeder

Complete stop for scraper cable	19-21	212 866 009
Stop for scraper cable	19	212 884 001
Washer for stop	20	212 885 000
Dowel pin	21	038 261 002
Scraper cable **D8 mm** x 12000	22	629 197
Alternative: Scraper cable **D6 mm** x 12000	22	645 845
Option: Protective plate for loading hopper	23	564 040
Complete protective plate inc.assembly parts		564 042

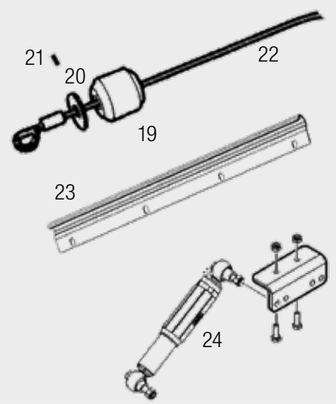

Option 100 km/h

Conversion kit from 80 km/h to 100 km/h	24	681 755

*inc. mounting kit


** Further plates on page 6

Service and Wear parts SP 11

Service and Maintenance Parts


Maintenance packages SP 11 LMR/TMR/THF	Art. No.	Old versions SP 11
Service package "50 h" (one-time)	658 758	Beliso DMB BMR DMR BMT DMT BMB DQR BUR DHF BHF
Service package "200 h"	658 759	
Service package "400 h"	658 761	

Contents of maintenance package	Fig.	Art. No.	400 h	200 h	50 h		
Oil filter motor	1	208 989 004	1×	1×	1×	1×	1×
Fuel filter	2	208 777 009	1×			1×	1×
Fuel pre-filter	3	211 233 006	1×			1×	1×
Hydraulic spin-on filter	4	453 109	1×	1×	1×	1×	
Air filter	5	455 656	1×			1×	
Air filter cartridge	6	455 658	1×			1×	
V-belt for generator	7	456 217	1×			1×	
Additional service and maintenance parts			**LMR**	**TMR**	**THF**		
Air filter	5	211 838 003					1×
Air filter cartridge	6	068 550 000					1×
Hydraulic spin-on filter	4	203 598 005					1×
V-belt fan wheel	7	456 218				1×	
V-belt compressor FINI	8	011 148 003	1×	1×	1×		
V-belt compressor ABAG	8	010 110 003	1×	1×	1×		
V-belt compressor FINI	8	440 662				1×	
V-belt compressor Chinook	8	214 748 006					1×
V-belt	7	041 115 006					1×
Thermostat	9	436 682	1×	1×	1×	1×	1×
Temperature transmitter	10	209 443 002	1×	1×	1×	1×	1×
Oil pressure switch	11	209 049 009	1×	1×	1×	1×	1×
for high-pressure water pump (Art. No. 578 458)							
Valve 180 bar for HDR	12	423 985	1×	1×	1×	1×	1×
Valve set HDR	13	423 984	1×	1×	1×	1×	1×
Valve set inlet	14	426 644	1×	1×	1×	1×	1×

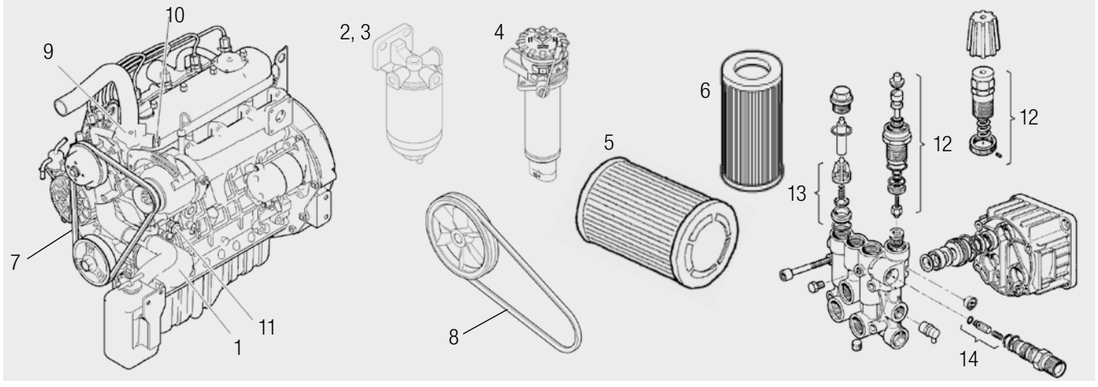

Wear parts and spare parts

Drive worm pump		Fig.	Art. No.
Hydraulic motor		1	662 106
Carrier		2	212 375 002
Rubber disc (2×)		3	084 013 000
Clamping ring		4	202 336 006
Clamping ring		5	204 257 002
Cardan shaft – plug-in version			
Cardan shaft for pump	2L6	6	437 419
Cardan shaft for pump	2L75	6	521 902
Cardan flange		7	206 515 001
Flexible disc		8	206 516 000
Alternative – screwed version 2L75			
Cardan shaft for pump	2L75	9	605 714
Cardan joint, reinforced		10	206 520 009
Worm pump catch			
Tie rod L=580 (2×)	2L6	11	010 266 009
Tie rod L=700 (2×)	2L75	11	202 382 005
O-ring		12	017 276 005
Intermediate ring		13	208 673 006
Worm pump – plug-in version			
Rotor with slot	2L6	14	211 814 001
Stator, can be clamped	2L6	15	211 355 007
Complete clamping jacket	2L6	16	010 433 007
Stator inc. clamping jacket	2L75	17	487 262
Rotor with slot	2L75	18	500 516
Alternative – screwed version 2L75			
Rotor with bore	2L75	19	487 261
Pressure connection with pressure gauge			
Pressure connection		20	424 263
Complete pressure gauge		21+22	420 989
Pressure gauge		21	418 711
Coupling ring		22	415 424
Hose coupling			
PM coupling MT50 – female part		23	211 600 008
Seal ring for MT50		24	213 266 000

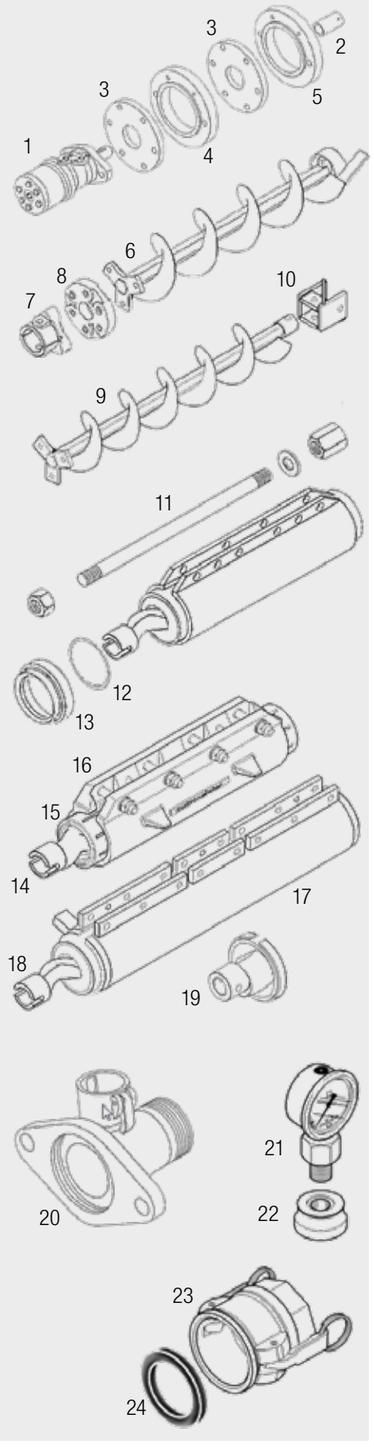

Service parts SP 25 DQR


Maintenance package

SP 25 DQR

	Art. No.
Service package "50 h" SP25 DQR	719 451
Service package "400 h" SP25 DQR	719 450
Service package "800 h" SP25 DQR	719 449

Contents of maintenance package

		Fig.	Art. No.	800 h	400 h	50 h
Oil filter	Kubota engine	1	641 396	1×	1×	1×
Fuel filter 1 µm	Kubota engine	2	641 397	1×	1×	
Fuel pre-filter	Kubota engine	3	641 398	1×	1×	
Air filter element (inner)	Kubota engine	4	641 406	1×		
Air filter element (outer)	Kubota engine	5	641 407	1×		
V-belt for generator	Kubota engine	6	719 430	1×		
Valve cover gasket	Kubota engine	7	719 428	1×		
Filter for oil trap	Kubota engine	9	641 408	1×	1×	
Filter element 10 µ paper	Compressor	9	272 318 009	1×		
Filter element 10 µ	Hydraulics	10	661 648	1×		1×
Filter element 10 µ	Hydraulic	10	661 648	1×		1×

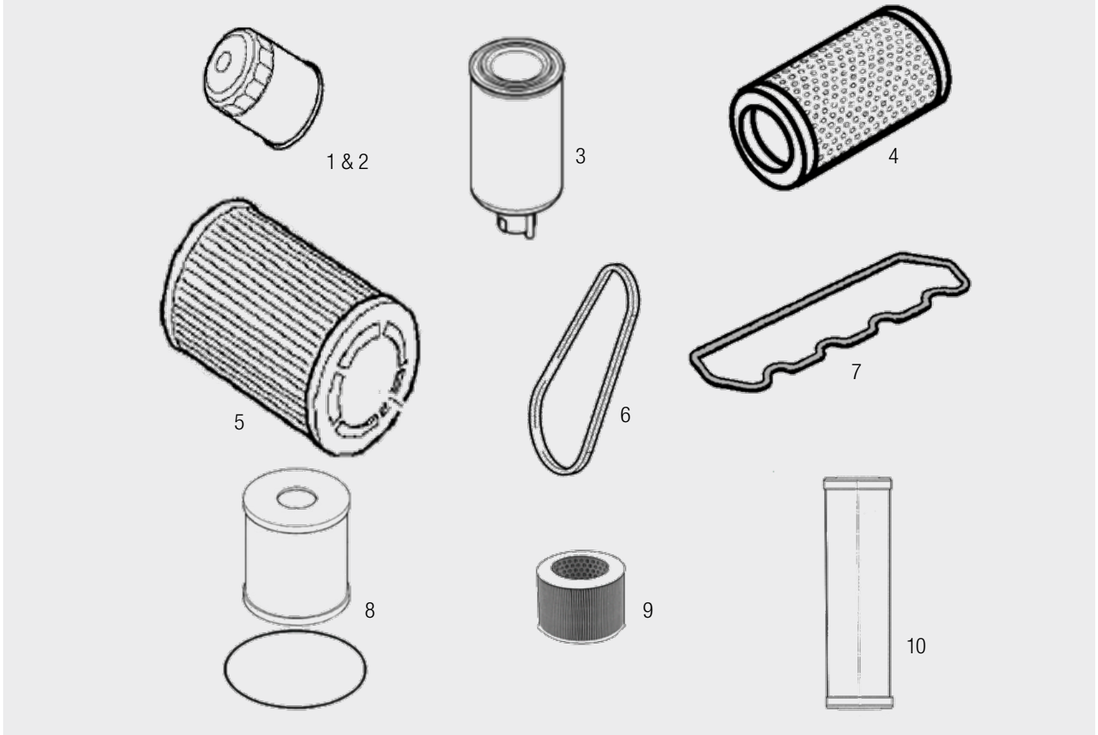

Wear parts and spare parts

Drive worm pump

	Fig.	Art. No.
Hydraulic motor	1	662 106
Carrier	2	212 375 002
Rubber disc (2×)	3	084 013 000
Clamping ring	4	202 336 006
Clamping ring	5	204 257 002

Cardan shaft – plug-in version

Cardan shaft	6	212 086 003
Flexible disc	7	206 516 000
Cardan flange	8	206 515 001

Worm pump catch

for worm pumps with 2L6 or 3L7:		
Tie rod L=580 (2×)	9	010 266 009
O-ring	10	017 276 005
Intermediate ring	11	208 673 006
for worm pumps with 2L74 or 2L75:		
Tie rod L=700 (2×)	9	202 382 005

Worm pump – plug-in version


Rotor with slot	2L6	12	211 814 001
Stator, can be clamped	2L6	13	211 355 007
Clamping jacket	2L6 complete	14	010 433 007
Rotor with slot	3L7	15	211 278 003
Stator maintenance free	3L7	16	213 638 007
Rotor with slot	2L74	17	212 506 004
Stator inc. clamping jacket	2L74	18	213 018 009
Rotor with slot	2L75	17	500 516
Stator inc. clamping jacket	2L75	18	487 262

Pressure connection with pressure gauge

Pressure connection	19	424 263
Complete pressure gauge	20	420 989
Pressure gauge	in 20	418 711
Coupling ring	in 20	415 424

Hose coupling

PM coupling MT50 – female part	23	211 600 008
Seal ring for MT50	24	213 266 000
Alternative: PM coupling VT50 – male part	23	205 273 001

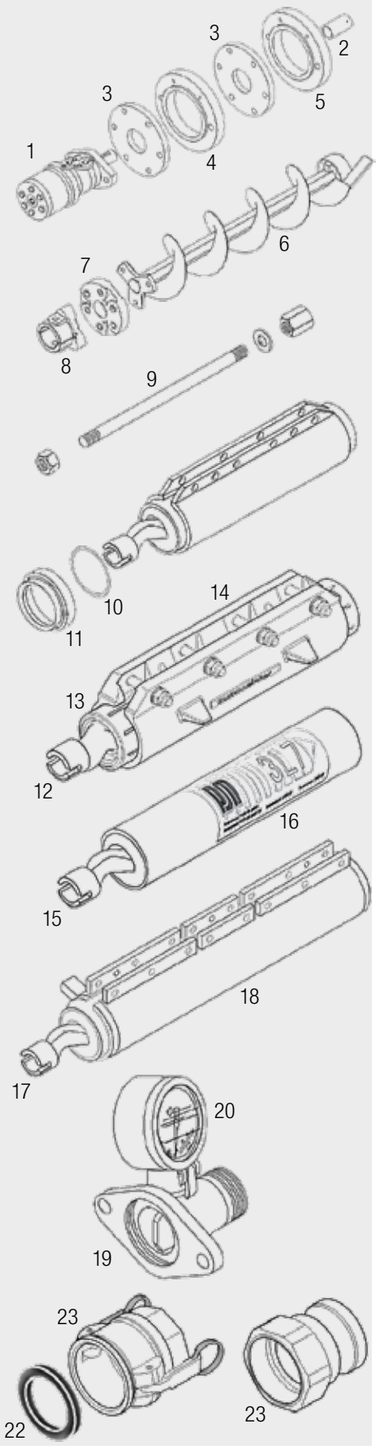

Service parts SP 25 DHF / FHS 250


Maintenance package

SP25 DHF/FHS250

	Art. No.
Service package "50h" SP 25 DHF / FHS 250	719 451
Service package "400h" SP 25 DHF / FHS 250	719 450
Service package "800h" SP 25 DHF / FHS 250	719 453

Contents of maintenance package

		Fig.	Art. No.	800 h	400 h	50 h
Oil filter	Kubota engine	1	641 396	1×	1×	1×
Fuel filter 1 µm	Kubota engine	2	641 397	1×	1×	
Fuel pre-filter	Kubota engine	3	641 398	1×	1×	
Air filter element (inner)	Kubota engine	4	641 406	1×		
Air filter element (outer)	Kubota engine	5	641 407	1×		
V-belt for generator	Kubota engine	6	719 430	1×		
Valve cover gasket	Kubota engine	7	719 428	1×		
Filter for oil trap	Kubota engine	8	641 408	1×	1×	
Filter element 10 µ	Hydraulic	9	661 648	1×		1×

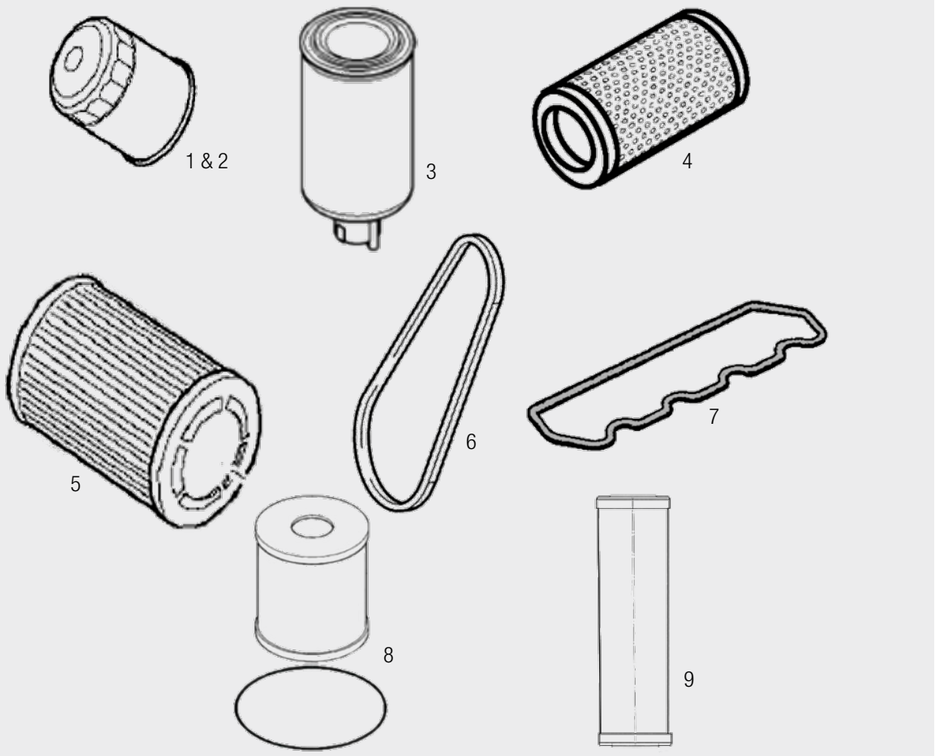

Wear parts and spare parts

Cardan shaft

	Fig.	Art. No.
Carrier	1	649 208
Flexible disc, small (2×)	2	H30 9100 0800
Cardan shaft	3	700 008
Carrier	4	H18 6203 4327

Worm pump 7515

		Fig.	Art. No.
Stator	7515 Premium	5	667 660
Rotor	7515	6	433 023

Worm pump 2L8

		Fig.	Art. No.
Stator inc. clamping jacket	2L8	7	H70 0050 8311
Rotor	2L8	6	H70 0050 8021

Pressure connection

		Fig.	Art. No.
Adapter flange (2×)	only for 7515	8	H18 0360 3420
O-ring (2×)	only for 7515	9	H21 0663 2104
Tie rod L630 for 7515 (3×)		10	H18 0360 3430
Tie rod L720 for 2L8 (3×)		10	H18 6403 1700
Mounting aid		11	H50 7574
Outlet cone		12	H18 6203 4229

Worm pump conversion


	2L8 -> 7515	7515-> 2L8	Fig.	Art. No.
Adapter flange	2×	not present	8	H18 0360 3420
O-ring	2×	not present	9	H21 0663 2104
Tie rod L630	3×	not present	10	H18 0360 3430
Tie rod L720	not present	3×	10	H18 6403 1700


Adapter with pressure gauge


	Fig.	Art. No.
Crosspiece	13	H18 0360 3111
Air vent cock	14	H18 0040 3200
PM coupling M35 – female part	15	H70 3535 1111
Seal ring for M35	in 15	213 725 004
Coupling ring	16	592 429
Pressure gauge	17	418 711

Hose coupling

	Fig.	Art. No.
PM coupling VT50 – male part	18	205 273 001
Alternative: PM coupling MT50 – female part	19	211 600 008
Seal ring for MT50	20	213 266 000

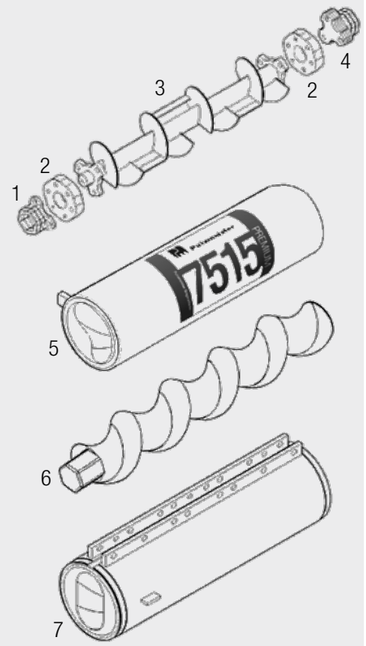

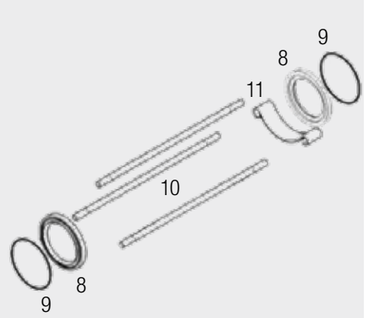

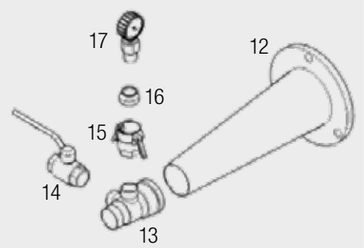



Service and maintenance parts S 5 EV/TM


Service and Maintenance Parts

Electric drive

	Art. No.
V-belt electric drive	204 399 009

Hopper seal

	Fig.	Art. No.
Rubber disc (2×)	1	084 013 000



Wear parts

Pan mixer TM – discharge gate


	Fig.	Art. No.
Rubber plate, small	2	207 280 005
Rubber plate, large	3	206 821.009


Pan mixer TM – mixing drum


	Fig.	Art. No.
Holder for scraper 1 (3×)	4	207 029 004
Scraper 1 (3×)	4	207 021 002
Holder for scraper 2	5	207 030 006
Scraper 2	5	207 022 001
Holder for scraper 3	6	207 031 005
Scraper 3	6	207 023 000

Cardan shaft worm pump screwed (old version until approx. 2011)

	Fig.	Art. No.
Hollow output shaft	7	201 960 004
Adjusting ring	8	204 885 005
Threaded pin	9	043 012 000
Screw M10	10	205 402 005
Cardan shaft (paddle)	11	207 268 001
Cardan joint	12	207 204 007
O-ring	27	017 276 005
Rotor 2L6 with bore	13	201 111 002
Stator 2L6, slotted	14	211 355 007
Complete clamping jacket	15	010 433 007



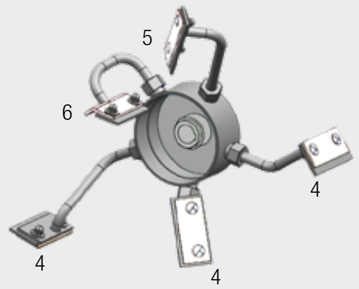

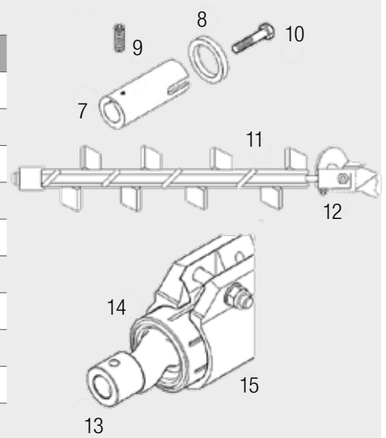

Wear parts and spare parts

Cardan shaft worm pump interlocked (current version)

	Fig.	Art. No.
Hollow output shaft	16	204 980 007
Cardan flange	17	205 085 008
Flexible disc	18	010 103 007
Cardan shaft – spiral	19	482 026
Alternative: Cardan shaft – paddle	20	702 738

Worm pump 2L6 – plug-in version

		Fig.	Art. No.
Rotor – slot	2L6	21	211 814 001
Stator	2L6	22	211 355 007
Clamping jacket	2L6 complete	23	010 433 007

Conversion 2L6 to 2L54 – up to 10 mm grain size

	Fig.	Art No
Cardan shaft – spiral	19	455 703
Rotor 2L54 – slot	24	211 739 005
Stator 2L54, clamping jacket integrated	25	523 235

Worm pump catch


	Fig.	Art No
Tie rod L=580 (2×)	26	010 266 009
O-ring	27	017 276 005
Intermediate ring	28	207 683 000

Pressure connection with pressure gauge

	Fig.	Art No
Pressure connection	29	424 263
Complete pressure gauge	30+31	420 989
Pressure gauge	30	418 711
Coupling ring	31	415 424

Pressure connection with pressure gauge

	Fig.	Art No
PM coupling MT50 – female part	32	211 600 008
Seal ring for MT50	33	213 266 000
Adapter male 50 to female 35	34	213 217 004

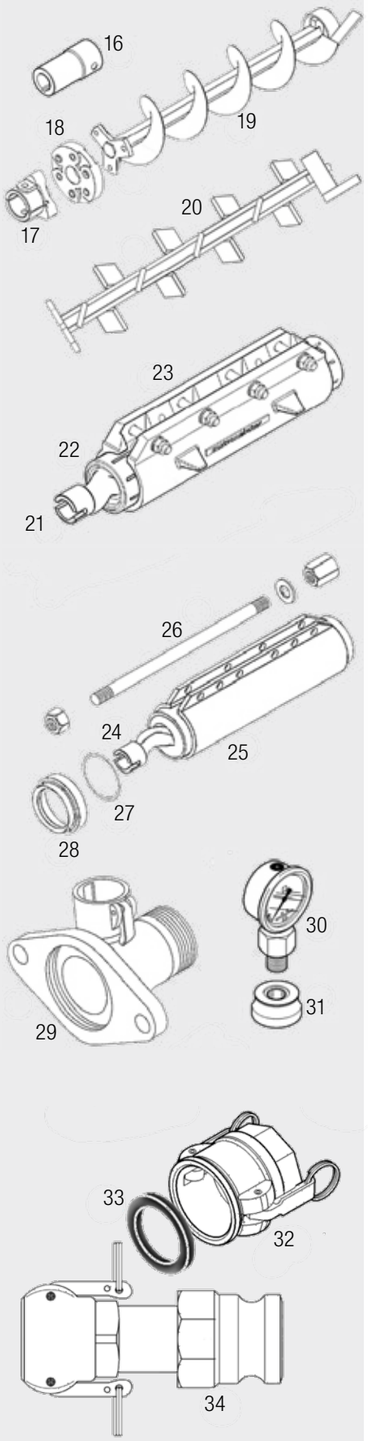

Service and wear parts MP 25

Service and Maintenance Parts

Kompressor 250L/Min 400V/50 KA (Art. No. 663 700)

	Art. No.
Filter (2×)	667 452
Safety valve	667 455
Check valve	687 357
Pressure switch	667 459
Motor protection switch	667 457



Pressure reducer – water armature (Art. No. 715 759) MP 25 Gen. 3

Sieve with ring	715 770
O-ring for sieve cup	043 874 002



Pressure reducer – water armature (Art. No. 014 064 003) M 25 Gen. 1 + 2

Sieve with ring	062 460 002
O-ring for sieve cup	041 095 003

Water pump – water armature (Art. No. 671 225)

Conversion kit old WP (420 147) to new WP (671 225)	688 642
Mechanical seal	682 518
Water filter insert WA	686 451

Wear parts and spare parts

Gear mot. 5.5 KW 230/400 (Art. No. 431 568)


	Fig.	Art. No.
Mercury limit switch	in 4	453 288
Shaft seal ring drive	in 4	470 884
Foam rubber profile for engine flange, 1 m	5	403 407
Carrier claw for screw conveyor	6	663 987

Mixer pump

Universal standard mixing spiral	7	211 773 003
Cementitious adhesive mixing spiral	8	214 571 008
Insulating plaster mixing spiral	9	212 262 005
Rotor D6-3	10	635 751
Stator D6-3 mf	11	635 718
Alternative: Stator D6-3 Action	12	635 709

Cleaner D 120 X 460 comp. (Art. No. 212 132 009)

Cleaner MP D 120	13	415 535
Cleaner shaft 460 MM	14	211 852 005

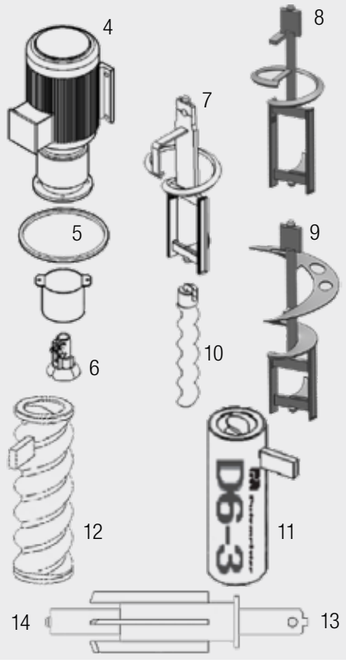

Wear parts and spare parts

Pressure flange M35-D6 with cpl. pressure gauge (Art. No. 488 287)

	Fig.	Art. No.
Pressure flange ID 35 with tie rod	1	488 286
PM coupling female 35 for pressure flange	2	211 599 009
PM reducer male 35 to male 25/40	3	207 795 008
Pressure gauge 60 bar cpl.	4	404 741
Pressure gauge protective cap	5	001 243 002
Reducing nipple for pressure gauge	6	208 086 004
Supporting ring for pressure gauge	7	208 064 000
Rubber disc for pressure gauge	8	208 063 001

Water armature (Art. No. 674 005)

	Fig.	Art. No.
Flow meter, complete	9	205 945 009
Measuring tube 300 – 1100L	in 9	208 206 004
2/2 way water control valve	10	479 422
Ball valve ID6 for water outlet	11	206 753 009
Pressure reducer	12	014 064 003
Pressure gauge 10 bar	13	687 969
Pressure switch	14	014 028 007
Handrail	15	213 289 003

Air armature (Art. No. 607 607)


	Fig.	Art. No.
Pressure gauge 6 bar	16	002 244 000

Agitator drive (Art. No. 674 340)

	Fig.	Art. No.
Clamping plate for scraper (2×)	17	207 552 007
Scraper for impeller (2×)	18	207 551 006

Control box (Art. No. 607 759)

	Fig.	Art. No.
Fine wire fuse 2.5 A T 250 V (2×)	19	254 398 005
Fine wire fuse 0.8 AM 500 V (4×)	19	423 299
Protective cap for double push-button	20	460 028

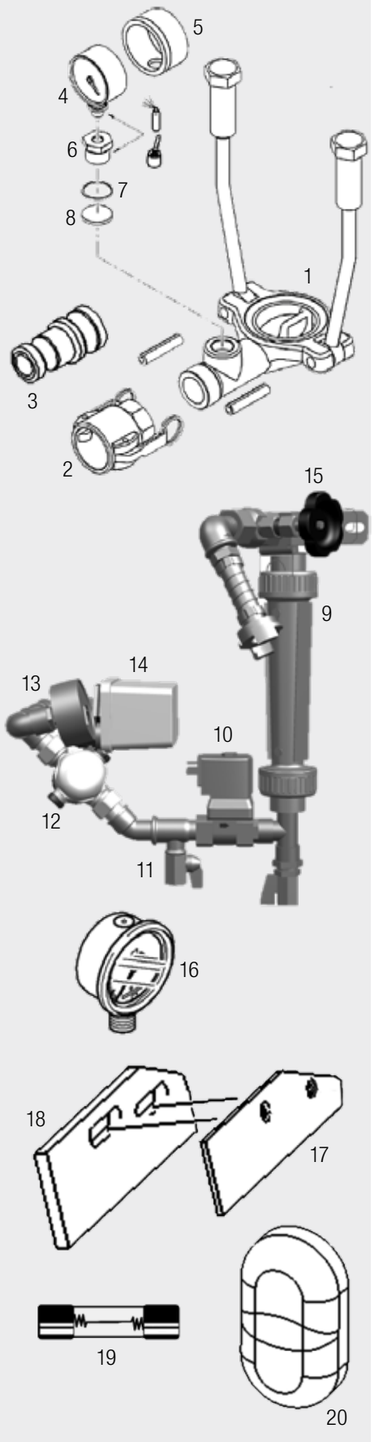

Service parts P 720/P 730


Maintenance package

P 720/P 730

	Version	Art. No.		Version	Art. No.
Service package "500h" P 720/P 730	Deutz	715 790		Hatz	732 935
Service package "1000h" P 720/P 730	Deutz	715 792		Hatz	732 980

Contents of maintenance package

		Fig.	Version	Art. No.	1000 h	500 h	Version	Art. No.	1000 h	500 h
Oil filter	Engine	1	Deutz	214 311 006	1×	1×	Hatz	732 923	1×	1×
Fuel spin-on filter	Engine	2	Deutz	700 422	1×	1×	Hatz	732 918	1×	1×
Fuel pre-filter	Engine	3	Deutz	700 421	1×	1×	Hatz	732 921	1×	1×
Air filter	Engine	in 4	Deutz	715 787	1×	1×	Hatz	715 787	1×	1×
Air filter secondary element	Engine	in 4	Deutz	715 786	1×	1×	Hatz	715 786	1×	1×
Fan drive V-belt	Engine	5	Deutz	700 679	1×					
Narrow V-belt	Engine	6	Deutz	700 550	1×					
Filter for crankcase venting	Engine	7					Hatz	732 928	1×	1×
Filter element 10 µ	Hydraulic	8	Deutz	223 192 009	1×	1×	Hatz	223 192 009	1×	1×
Dirt trap 125 µm	Hydraulic	9	Deutz	691 484	1×		Hatz	691 484	1×	

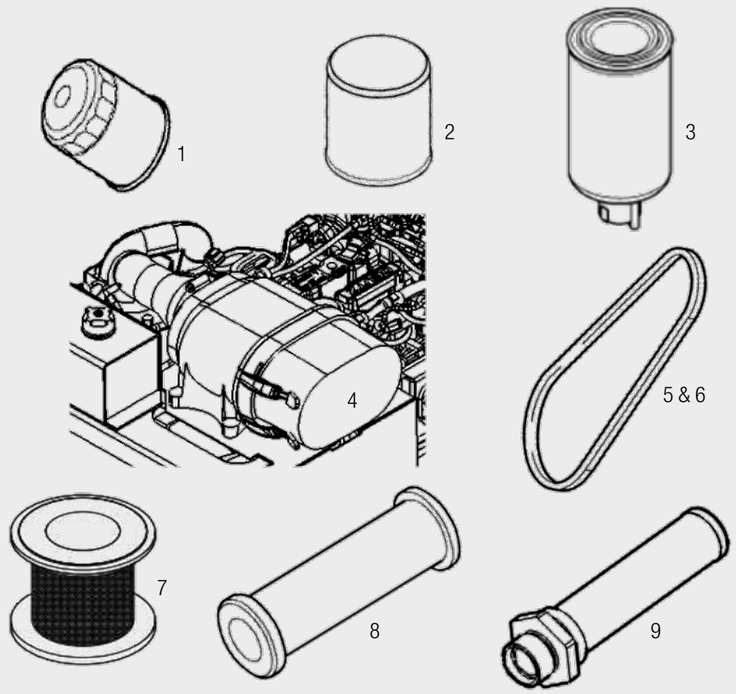

Wear parts and spare parts

P 720 & P 715 standard wear part set Duro 11 dia. 120 (Art. No. 265 550.007)

	Fig.	Art. No.
Spectacle wear plate	1	255 546 005
Wear ring	2	259 870 007
O-ring	3	225 422 007
Sponge rubber profile	4	267 926 008
Alternative highly wear-resistant Duro 26		
Spectacle wear plate	1	603 590
Wear ring	2	590 988

P 730 standard wear part set Duro 22 dia. 180–160 (Art. No. 440 265)


	Fig.	Art. No
Spectacle wear plate	5	444 384
Wear ring	6	251 231 000
Thrust ring	7	249 304 004
O-ring (2×)	8	233 925 004
Alternative carbide*		
Spectacle wear plate	5	666 025
Wear ring	6	666 026


P 718 standard wear part set Duro 22 dia. 150–160 (Art. No. 431 292)


	Fig.	Art. No
Spectacle wear plate	5	430 406
Wear ring	6	430 408
Thrust ring	7	430 378
O-ring (2×)	8	043 435 001
Alternative highly wear-resistant Duro 26		
Spectacle wear plate	5	584 043
Wear ring	6	584 045

Delivery piston

	Fig.	Art. No
for P 720 – P 715 – P 718		
Delivery piston collar	9	056 839 005
Guide ring	10	019 447 007
for P 730		
Compact piston	11	019 033 000
High-quality alternative to Art. No. 025 032.008 delivery piston cpl.		
Delivery piston set	12	710 846
Spare delivery piston collar	9	056 839 005
Spare guide ring	10	056 123 009

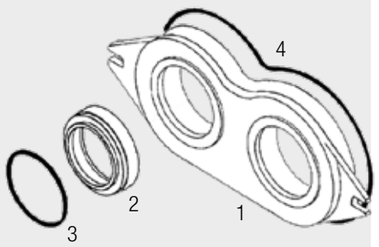

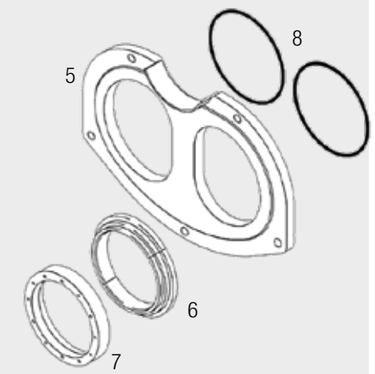

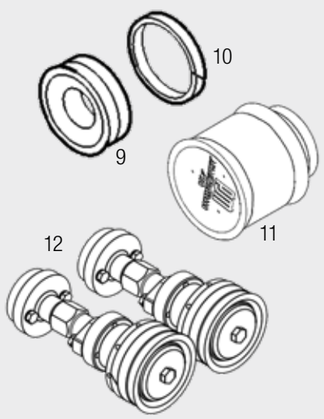

*Not impact-resistant and not suitable for media which involve blasting wear.

Service and Wear parts P 13

Service and Maintenance Parts

Maintenance packages P 13 DMR/EMR

	Art. No.
Service package "50 h" (one-time) **DMR/EMR**	no kit
Service package "200 h" **DMR**	656 984

Contents of maintenance package


		Fig.	Art. No.	200 h	50 h
Filter element 10 µ compressor			272 318 009		1×
Fuel filter	Lombardini	1	591 879	1×	
Engine oil filter	Lombardini	2	591 878	1×	
Seal ring	Lombardini		037 534 002	1×	
Fuel filter	Hatz	1	209 478 006		
Engine oil filter	Hatz	2	461 905		

V-belt			Current version **111632xxx**			Old version **111460xxx**		
			DMR	**EMR**		**DMR**	**EMR**	
	Fig.	**Art. No.**		**50 Hz**	**60 Hz**		**50 Hz**	**60 Hz**
Pump drive V-belt	3	013 168 007	1×					
	3	010 110 003		1×	1×	1×	1×	1×
Mixer drive V-belt	3	013 232 001	1×	1×	1×	1×	1×	
	3	043 111 008						1×
Compressor V-belt	3	013 165 000	1×	1×				
	3	010 409 002			1×			
	3	011 148 003				1×	1×	
	3	440 662						1×
Agitator shaft V-belt	4	003 382 000	2×	2×	2×	2×	2×	2×


Air armature control unit machine P 13 EMR and DMR


Sieve filter for line	5	002 238 003	2×	2×	2×	2×	2×	2×

DMR – diesel



EMR – electric













Wear parts and spare parts

Overpressure relief valve material – 40 bar (Art. No. 490 664)

	Fig.	Art. No.
Valve ball VG 50 rubber	1	013 153 009

Mixer, top (Art. No. 210 482 007) = bearing flange open (Art. No. 205 926 002)

	Fig.	Art. No.
Rubber disc (2×)	2	210 304 004
Socket (2×)	3	205 220 009

Hopper below (Art. No. 210 485 004) = bearing flange open (Art. No. 205 926 002)

	Fig.	Art. No.
Rubber disc (2×)	2	210 304 004
Socket (2×)	3	205 220 009

Mixer discharge gate – mixer emptying (Art. No. 210 313 008)


	Fig.	Art. No.
Rubber mat 15 × 350 × 200	4	201 574 005
Cup spring for mixer discharge gate (4×)	5	038 117 004


Membrane for clutch actuation (Art. No. 071 885 005)


	Fig.	Art. No.
Rubber membrane (rubber disc) (2×)	6	011 129 006


Coupling on gearbox (Art. No. 072 524 006)


	Fig.	Art. No.
Pressure plate	7	063 284 009
Coupling disc	8	002 063 003
Disengaging thrust ring	9	014 773 006
Deep groove ball bearing	10	011 165 002
Disengaging bolt, complete	11	011 119 003











Service and Wear parts P 13 (continuation)


Pump KA 230 (Art. No. 508 927)

Standard valve seats

	Fig.	Art. No.
Valve seat, steel, 89 × 60 × 16, (2×)	1	530 095
Valve ball, steel, 70 V, (2×)	2	013 282 006

Alternative

	Fig.	Art No
Valve seat, steel, 89 × 40 × 16, (2×)	1	on request
Valve ball, rubber, with 45 steel core, (2×)	2	002 075 004
O-ring, valve seat (2×)	3	013 285 003
O-ring, delivery cylinder (2×)	4	013 157 005
Felt strips (2×)	5	013 158 004
Leather collar (2×)	6	013 276 009
Reducing ring (2×)	7	013 288 000

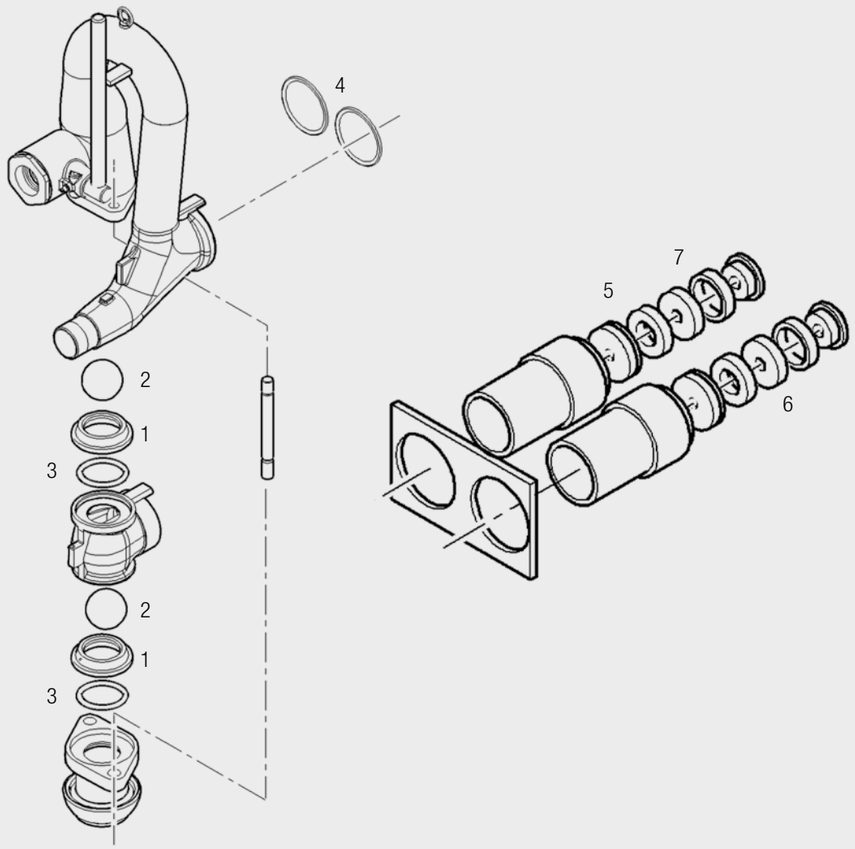

Wear parts Pump KA 139 (Art. No. 013 192 002)

Standard valve seats


	Fig.	Art. No.
Valve seat, steel, 70 × 40 × 15, (2×)	1	495 543
Valve ball, rubber, with 60 steel NBR (2×)	2	207 760 004
or Valve ball, rubber, with 60 steel SBR (2×)	2	013 171 007


Alternative for rough material


	Fig.	Art No
Valve seat, steel, 70 × 40 × 15, (2×)	1	495 543
Valve ball, steel, 50 V III, (2×)	2	013 179 009

Alternative to insulation plaster, light material

	Fig.	Art No
Valve seat, steel, 70 × 40 × 24, (2×)	1	013 879 008
or Valve seat, plastic, 80 × 44 × 22 (2×)	2	013 117 003
Valve ball, steel, 60 V, (2×)	2	042 477 002
O-ring (2×)	3	013 154 008
O-ring (2×)	4	013 157 005
Felt strips (2×)	5	013 158 004
Leather collar (2×)	6	203 287 002
Rubber expanding ring (2×)	7	013 145.004

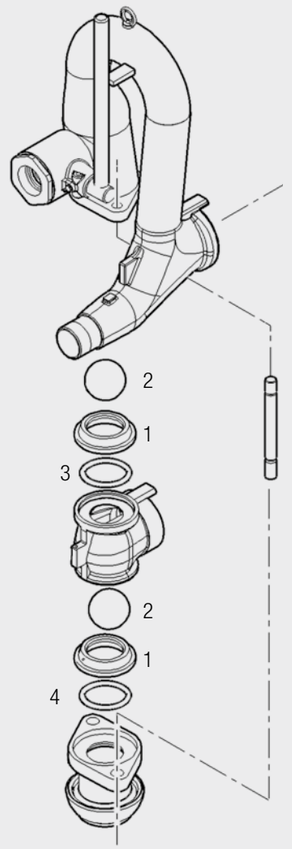

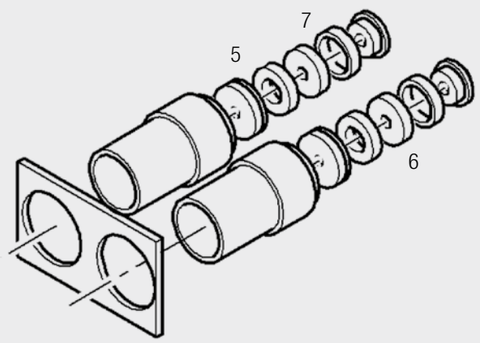

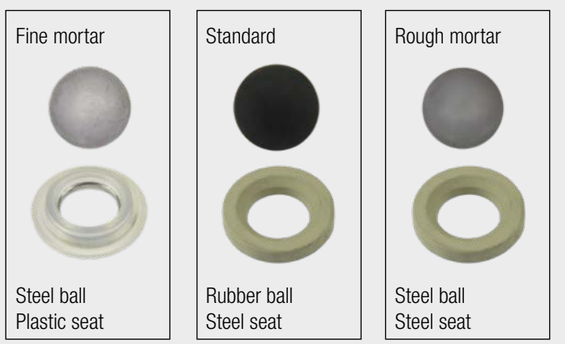


Service and Wear parts SP 20 GHF/2

Service parts SP 20 GHF/2

SP 20 GHF/2


	Fig.	Art. No.
Air filter cartridge – main air	1	646 753
Air filter secondary element	2	646 810
Filter cartridge – engine	3	208 989 004
Fuel pre-filter head	4	211 231 008
Fuel filter insert	in 4	208 777 009
V-belt for alternator	5	712 172
Hydraulic filter	6	650 186
Filter cartridge – oil tank	7	724 575

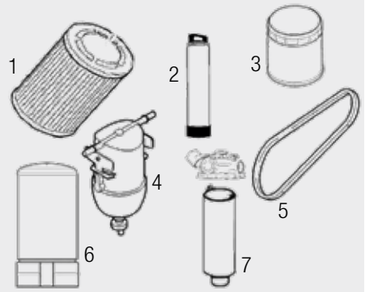

Wear parts and spare parts

Cardan shaft

	Fig.	Art. No.
Cardan shaft	8	706 290
Carrier, hexagon head	9	L72 106
Carrier wear plate	10	L72 105
Flexible disc	11	H30 9100 0290
Worm pump		
Clamping jacket 2L8 weiß	13	L920 032
Screw conveyor 2L8 hexagon head	14	L920 033
Alternative: Clamping jacket 7515 Premium	15	748 330
Worm pump catch		
Mounting frame	15	706 333
O-ring (2×)	16	706 332
Locking mechanism	17	706 334
Pressure connection with pressure gauge		
Outlet cone	18	706 291
Gasket	19	629 205
Pressure gauge	20	420 989
Self-sealing coupling	21	208 454 005
Hose coupling		
Outflow VT50 – male part	22	629 874
Outflow MT50 – female part	23	629 203
Gasket for MT50	24	415 424

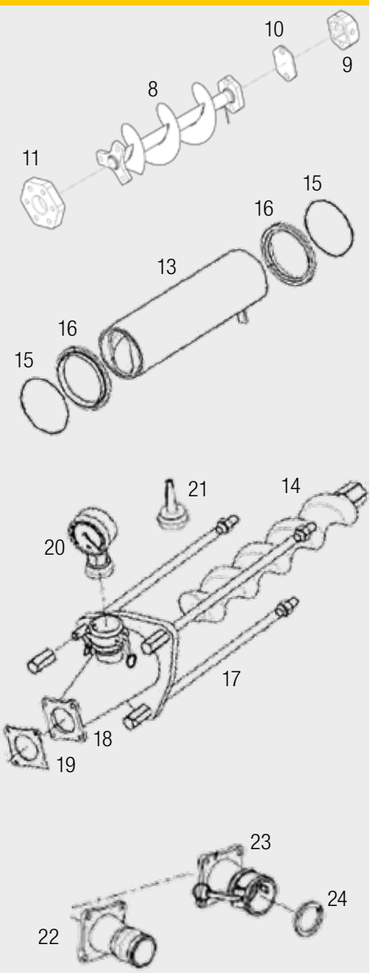

Remote controls

S5 EV

		Fig.	Art. No.
S5 EV	Wired remote control Emergency stop 20m	1	601 876
	Wired remote control Emergency stop 60m	1	601 920



SP 11

		Fig.	Art. No.
SP 11	Radio remote control 9-35VDC	2	582 609
	Wired remote control SP11 LMR/TMR		581 123



SP 20 / FE 400

		Fig.	Art. No.
SP 20 GHF	Radio remote control		722 491
SP 20 THF / FE 400	Radio remote control	3	631 408



SP 25 DQR / DHF / FHS 250

		Fig.	Art. No.
SP 25 DQR	Radio remote control CAN o.R	4	763 859*
SP 25 DHF / FHS 250	Radio remote control CAN o.R	4	763 859*
SP 25 Australien	Radio remote control CAN AU	4	779 923

* When replacing the old AN 702 526 radio with a new one, a software update is required



Remote controls

P 720 / P 730 / P 715 / P 718

		Fig.	Art. No.
P 720 / 730	Wired remote control 12/24 V DC	1	690 933
	Radio remote control 12/24 V DC (EU)	2	762 668
	Radio remote control 12/24 V DC (Australia)	2	762 667
P 715	Wired remote control 12 V		535 423
	Wired remote control 20 m with flow rate adjustment		529 918
	Radio remote control 869 MHz (EU)		533 250
	Radio remote control 433 MHz (Saudi Arabia)		562 934
	Radio remote control 433 MHz (Australia)		676 817
P 718	Wired remote control 12 V		535 423
	Wired remote control 20 m with flow rate adjustment		529 918
	Radio remote control 10-30 VDC for P 715 (US)		436 342
	Radio remote control 869 MHz (EU)		533 250



1



2

M 740 D(H)BS / M 760 D(H)BS (from Gen. 4)

		Fig.	Art. No.
M 740 D(H)BS	Radio remote control HBC GII	3	778 292
M 760 D(H)BS	Radio remote control HBC GII	3	778 292

EstrichBoy DC 260/45 (55) / EC 260 / EC 350 / DC 450/4 (5) / EC 450

		Fig.	Art. No.
DC 260/45 (55) DBS - Stage V / Non-EU	Radio remote control HBC GII	3	778 292
EC 260/35 DBS	Radio remote control HBC GII	3	778 292
EC 260/45 DBS	Radio remote control HBC GII	3	778 292
EC 350 DBS	Radio remote control HBC GII	3	778 292
EC 450 DBS	Radio remote control HBC GII	3	778 292
DC 450/4 DBS	Radio remote control HBC GII	3	778 292
DC 450/5 DBS	Radio remote control HBC GII	3	778 292
EstrichBoy DBS (up to Gen 3)	Radio remote control EHB	4	H 519 269



3



4

Useful

Conversion of inches to millimetres

Inches Fraction	Inches Decimal	mm Metric
1/64"	0,016"	0,397 mm
1/32"	0,031"	0,794 mm
1/16"	0,063"	1,587 mm
1/8"	0,125"	3,175 mm
1/4"	0,250"	6,350 mm
3/8"	0,375"	9,525 mm
1/2"	0,500"	12,700 mm
5/8"	0,625"	15,875 mm
3/4"	0,750"	19,050 mm
7/8"	0,875"	22,225 mm
1"	1"	25,400 mm
1 1/4"	1,250"	31,750 mm
1 1/2"	1,500"	38,100 mm
1 3/4"	1,750"	44,450 mm
2"	2"	50,800 mm
2 1/4"	2,250"	57,150 mm
2 1/2"	2,500"	63,500 mm
2 3/4"	2,750"	69,850 mm
3"	3"	76,200 mm
3 1/4"	3,250"	82,550 mm
3 1/2"	3,500"	88,900 mm
3 3/4"	3,750"	95,250 mm
4"	4"	101,60 mm
4 1/4"	4,250"	107,95 mm
4 1/2"	4,500"	114,30 mm
4 3/4"	4,750"	120,65 mm
5"	5"	127,00 mm
5 1/2"	5,500"	139,70 mm
6"	6"	152,40 mm
7"	7"	177,80 mm
8"	8"	203,20 mm
9"	9"	228,60 mm
10"	10"	254,00 mm

Conversion of volumetric fow rate

l/min	m^3/h	cfm*
100		3,5314
2,825	170	100
	1,699	1

* cubic foot per minute



You can also find a quick overview of all application solutions in our application overview brochure.

You can find a fully detailed overview of all machines and products in our general catalogue.

Ask your Putzmeister dealer or contact us directly. We will send you the required information material immediately.





Technical changes and errors excepted © by Putzmeister Mörtelmaschinen GmbH 2026 All rights reserved (26.05 Sc) MT 4573-4 EN

Putzmeister Mörtelmaschinen GmbH
Max-Eyth-Straße 10 · 72631 Aichtal / Germany
P.O.Box 2152 · 72629 Aichtal / Germany
Tel. +49 (7127) 599-0 · Fax +49 (7127) 599-743
mm@putzmeister.com · www.putzmeister.com

Putzmeister